

Hog Pump®

Multi-Use Delivery Systems

Built to be rugged, robust and reliable, EZG's line up of pumps handle most types of construction material with ease. Designed specifically for grout, mortar and concrete, the line-up offers both skid-steer and trailer hitch models for easy transport to and from job sites.

With four different models to select from, each built to suit the budgets, reach and transport needs of just about any contractor, EZG's got a hog for everyone.



HP-20T4 Features:

- Ideal for filling block walls with grout or pea gravel; handles grout, mortar and concrete
- Plus 1 control system with a DM430 Digital display for diagnostic & monitoring
- Pumping distance of 800 ft. (244 m) horizontal and 200 ft. (61 m) vertical
- Handles up to 3/4" (20 mm) aggregate
- Features an 8 cu.ft. (225 L) hopper
- Delivers up to 18 cu.yd. (13.8 m³) per hour with a 2" (50 mm) line
- Fully-reversible S-Tube valve for increased ease and safety over "ball valve" designs
- Optional wireless remote option for operator convenience and safety



HP-38 / 38SM / 38SS Features:

- Handles self-consolidating, 3/8" ready mix and light-weight concrete as well as masonry grout, pour & form; shotcrete and slurry.
- Progressive cavity pumping with variable speed hydraulics and reversible functionality
- Handles 3/8" (10 mm) pea gravel
- Features an 8 cu.ft. (225 L) hopper
- Delivers up to 12 cu.yd. (9.2 m³) per hour with a 2" (50 mm) line
- Diesel and electric power supply options

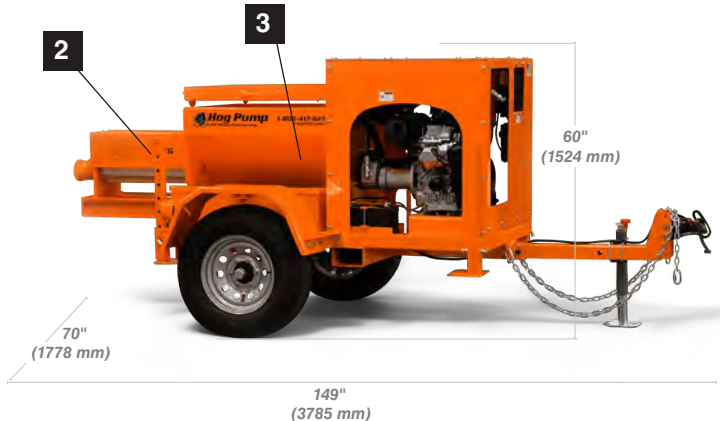

S-Tube valve delivers increased safety



Rotor stator builds pressure in cavities for optimal delivery.



Progressive cavity pumping.

Increase efficiency, profitability and safety on the job.

Model HP-38



Model HP-38SM



Model HP-38SS



Hog Pump® Specifications

| MODEL | HP-20T4 | HP-38 | HP-38SM | HP-38SS |
|--------------------------------------|---|---|---|---|
| Overall Dimensions: (L x W x H) | 162" x 72" x 84" (4115 x 1829 x 2133 mm) | 120" x 72" x 70" (3048 x 1829 x 1778 mm) | 110" x 60" x 50" (2794 x 1524 x 1270 mm) | 94" x 48" x 48" (2387 x 1219 x 1219 mm) |
| Hopper Capacity | 8 cu.ft (225 L) | 8 cu.ft (225 L) | 8 cu.ft (225 L) | 8 cu.ft (225 L) |
| Aggregate Size | 3/4" (20 mm) | 3/8" (10 mm) | 3/8" (10 mm) | 3/8" (10 mm) |
| Power Source | Kubota Diesel 59 HP (44 kw) | Kohler ECH980 38 HP (28 kw) | Kohler ECH980 38 HP (28 kw) | Auxiliary Hydraulic Powered up to 42 GPM @ 2,600 psi. |
| Axel Kit | standard | standard | -- | -- |
| Material Discharge/ (output line) | 15 cu.yd. (11.5 m³) / 2" (50 mm) | 8-12 cu.yd. (6.1-9.2 m³) / 2" (50 mm) | 8-12 cu.yd. (6.1-9.2 m³) / 2" (50 mm) | 8-10 cu.yd. (6.1-7.6 m³) / 2" (50 mm) |
| Wheels | 15" (381 mm) | 15" (381 mm) | -- | -- |
| Weight | 3200 lbs. (1,451.5 kg) | 2800 lbs. (1270.1 kg) | 2000 lbs. (907.2 kg) | 1135 lbs. (514.8 kg) |



HP-20T4 Model
optional wireless
remote feature



HP-38 Series Model
optional wireless remote
feature



[LEARN MORE]

f in @ Love it?

We want to hear from you.

Snap a photo or capture a video of your team putting any of our Hog Pumps to use and post it.

Remember to tag us @EZG and use #leanmasonry, in your post.

... Thank you for your continued commitment to the EZG product line.



1-800-417-9272 / ezgmfg.com / sales@ezgmfg.com

1833 N. Riverview Road, Malta, Ohio 43758

EZG Manufacturing is a division of EZ Grout Corporation. All EZG Manufacturing products are backed by our **two-year warranty** on parts unless otherwise stated and are available for order direct through our website.

