



EZG[®]
Manufacturing

Masonry/Construction Equipment



Wireless Remote
A wireless remote option is available on gas powered units.



Model UGPHC75
Uphill Grout Hog shown with optional gas power and crane bale.



Grout Hog crane bale system in use.

GROUT HOG®



Model GPHC75

- Built for use with crane or forklift
- Will deliver up to 3/4" aggregate (1.9 cm)
- Unloads 3/4 cu. yd. (.57 m³) in approx. 2 1/2 minutes
- GX390 11.7 HP Honda® engine with electric start (optional diesel engine or electric motor available)
- Unique swivel-base system allows workers to reach 17 ft. (5.2 m) of wall quickly without moving forklift
- 8 ft. (2.44 m) reinforced, collapsible dispensing hose (standard)
- Removable auger allows for 15 minute clean up
- Hydraulic shut off allows for easy control of high slump or SCC concrete



Model GH75

- Hooks to auxiliary hydraulics of forklift
- Will deliver up to 3/4" aggregate (1.9 cm)
- Unloads 3/4 cu. yd. (.57 m³) in approx. 2 1/2 minutes
- Delivers sand and dry materials
- Unique swivel-base system allows workers to reach 17 ft. (5.2 m) of wall quickly without moving forklift
- 8 ft. (2.44 m) reinforced, collapsible dispensing hose (standard)
- Removable auger allows for 15 minute clean up
- Hydraulic shut off allows for easy control of high slump or SCC concrete



Model UGPH75

- Will deliver up to 1/2" (1.27 cm) aggregate
- Makes grouting from the scaffold side of the wall easier
- Unloads 3/4 cu. yd. (.57 m³) in approx. 2 1/2 minutes
- Removable auger and hopper tilt allows for 15 minute clean up
- Extended auger tube saves several feet of boom extension on your forklift
- Decreased head height allows pouring up close to bar joist on interior walls
- Unique swivel base allows grouting from all angles while eliminating extra forklift moves.
- 8 ft. (2.44 m) reinforced, collapsible dispensing hose standard
- Pendant cable control operation (forward and reverse); optional wireless remote



PRODUCT SPECIFICATIONS

Model	GH75	GPH75	GPHC75	UGH75	UGPH75	UGPHC75
Machine Type	Horizontal Auger	Horizontal Auger	Horizontal Auger	Uphill Auger	Uphill Auger	Uphill Auger
Lifting Bale	N/A	N/A	Standard	N/A	N/A	Standard
Capacity - cu. yd. (m³)	3/4 (0.57)	3/4 (0.57)	3/4 (0.57)	3/4 (0.57)	3/4 (0.57)	3/4 (0.57)
Material Discharge	3/4 cu. yd. 2.5 minutes	3/4 cu. yd. 2.5 minutes	3/4 cu. yd. 2.5 minutes	3/4 cu. yd. 2.5 minutes	3/4 cu. yd. 2.5 minutes	3/4 cu. yd. 2.5 minutes
Power Source	Auxiliary	Honda GX390 11.7 HP (8.7 kw)	Honda GX390 11.7 HP (8.7 kw)	Auxiliary	Honda GX390 11.7 HP (8.7 kw)	Honda GX390 11.7 HP (8.7 kw)
Aggregate Size in. (cm)	3/4 (1.9)	3/4 (1.9)	3/4 (1.9)	1/2 (1.3)	1/2 (1.3)	1/2 (1.3)
Hyd. Flow Rate gpm@2000psi	10	10	10	10	10	10
Empty Weight lb. (kg)	990 (449)	1436 (651.4)	1525 (691.7)	1055 (478.5)	1475 (669)	1565 (709.8)
Gross Weight lb. (kg)	4010 (1819)	4436 (2012)	4525 (2053)	4055 (1839)	4475 (2030)	4565 (2071)
Dimensions L x W x H in.	81 x 42 x 48	81 x 42 x 48	81 x 42 x 66	98 x 48 x 48	98 x 48 x 48	98 x 48 x 66



Grout Hog®

CUSTOMER REVIEWS

★★★★★ **GROUT HOG®**

Tracy Kiser, Kiser Masonry

"Our company has three Grout Hog's that we work with. We purchased our first Grout Hog about 10 years ago and still use it on our jobsites. Our most recent purchase was the Uphill Grout Hog and it was definitely a great addition to our fleet. We can really tell the increase in production time when using these products."

Bob Schroeder, Jensen Masonry

"The Grout Hog saves us time and money when it comes to slugging the walls. Our foremen on two different jobsites were fighting over the Grout Hog we own. We should own more, they work like a champ. You can grout up to 8 yards of core fill in under 45 minutes under ideal working conditions."

Geno Virgili, Mardo Masonry

"The Grout Hog is uniquely designed and efficient means of installing grout regardless if "Low Lift or "High Lift" grouting methods are being utilized. When the amount of grout needing installed does not justify the use of a conventional standard line - Mobile grout pump. The Grout Hog is a time and money saver. In a very short period of time the Grout Hog pays for its initial cost with the efficient delivery of grout into the wall. (GREAT PRODUCT)!"



Solid Grate Cover

A solid grate cover can be added to any Mud Hog Mixer to help control dust on the jobsite. The solid grate has two separate openings; one for adding mix, the other for water intake.



Loads below waist



Dump into Grout Hog

MUD HOG® MIXERS



Model MH9



- 2 to 3 bag capacity or 9 cu. ft. (.25 m³)
- Will mix up to 3/4" (1.9 cm) aggregate
- Hydraulic drive, hydraulic dump
- GX270 8 HP Honda® engine (optional electric motor)
- Unique paddle design consists of four reversible mixing paddles to decrease batch time; one-year warranty on rubber blades
- Adjustable height - loads below waste high enough to load into a wheelbarrow
- Highway tires and torsion axle for smoother suspension; tow package is designed to pull from the side so that wheels are out of the way of wheelbarrow or the forks on a forklift
- Easier to back into sand pile
- Optional brake and light kit

Model MH12



- 3 to 4 bag capacity or 12 cu. ft. (.34 m³)
- Will mix up to 3/4" (1.9 cm) aggregate
- Hydraulic drive, hydraulic dump
- GX390 11.7 HP Honda® engine with electric start (optional diesel engine or electric motor available)
- Fork pockets accessible from all four sides
- Unique paddle design consists of four reversible mixing paddles to decrease batch time; one-year warranty on rubber blades
- Adjustable height - loads below waste for reduced fatigue and can be raised to dump directly into a Grout Hog

Model MH20



- 6 to 7 bags or 20 cu. ft. (.57 m³)
- Will mix up to 3/4" (1.9 cm) aggregate
- Hydraulic drive, hydraulic dump
- 5/16 in. thick steel rolled drum and 3/8 in. thick steel drum ends
- GX390 11.7 HP Honda® engine with electric start (optional diesel engine or electric motor available)
- Fork pockets accessible on all four sides
- Compacts to fit in standard 8 ft. (2.44 m) truck bed
- Unique paddle design consists of six reversible mixing paddles to decrease batch time; one-year warranty on rubber blades
- Adjustable height - loads below waste for reduced fatigue and can be raised to dump directly into a Grout Hog.



PRODUCT SPECIFICATIONS

Model	MH9	MH12	MH20
Capacity - cu. ft. (m³)	9 (.25)	12 (.34)	20 (.57)
Capacity - Bags	2 to 3	3 to 4	6 to 7
Power Source	Honda GX270 8.5 HP (6.3 kw)	Honda GX390 11.7 HP (8.7 kw)	Honda GX390 11.7 HP (8.7 kw)
Engine Starting	Manual Recoil	Recoil/Electric	Recoil/Electric
Max Aggregate Size in. (cm)	3/4 (1.9)	3/4 (1.9)	3/4 (1.9)
Drum Thickness in.	1/4	End 3/8; Wrap 1/4	End 3/8; Wrap 5/16
Forklift Pockets	Optional	Standard	Standard
Axle Kit	Standard	Optional	N/A
Dimensions L x W x H in. (cm)	94 x 35 x 54 (234 x 89 x 137)	82 x 42 x 50 (208 x 107 x 127)	96 x 44 x 53 (244 x 112 x 135)
Adjustable Discharge Height in. (cm)	Up to 26 (66)	Up to 49 (124)	Up to 51 (130)
Drive System	Hydraulic	Hydraulic	Hydraulic
Dump Action	Hydraulic	Hydraulic	Hydraulic
Empty Weight lb. (kg)	1325 (601)	1700 (771)	2300 (1043)

Model	Description
MH9LIGHTKIT	Tail Light Kit, Model MH9
MHLIGHTKIT	Tail Light Kit, Model MH12
HMH-A-1	High Rise Conversion Kit, MH12



Mud Hog® Mixers

CUSTOMER REVIEWS

★★★★★ **MUD HOG[®] MIXERS**

Dale Kartman, Specialized Equipment Rentals

"We purchased our first EZG Mud Hog mixer, a MH20, in 2007. Since that time we have purchased six more MH20's. Here at Specialized Equipment Rentals we like to invest in equipment that is going to last and after test driving the MH20, we were convinced that the Mud Hog Mixer was robust and was built to last. Everything about the EZG Mud Hog mixers has been well designed from the tub seals, paddle rubbers down to the bearings/sprockets and any repairs are fast and easy. And If you have a suggestion on changing something that might improve their product they are always willing to listen! This day and age you don't find that too much in the industry anymore. As with any piece of equipment, if you give it proper maintenance, it will give you many years of dependability. I guess that's why Specialized Equipment Rentals has a total of 63 pieces of EZG mixers and Grout Hogs in our fleet."

Mackie Bounds, Brazos Masonry

"There is no doubt in my mind that the Mud Hog mixers are the best mixers we have ever used. After purchasing two mixers from EZG and putting these to test in the field, I plan on changing my entire fleet of mixers to the Mud Hogs."

Paul M. Cantarella, Cantarella & Son, Inc.

"By far this is the best mixer on the Market. From the ease of maintenance to the safety of the labor mixing the Mortar, it is amazing. Every aspect of the machine was carefully thought out to make mixing as easy as possible. From the new enclosed lids to keep the dust down to a tool box for storage, they have everything perfectly placed. They are always trying to improve their products. I have been in the industry since I was 8 or 9 driving to jobsites and seeing our mixers on the job. With 30 years' experience in this field I can confidently say hands down this is the best Masonry Mixer ever made PERIOD."



The EZG Mixers dump easily into the Hog Troughs or a wheel barrow without having to be raised on blocks.



The EZG Mixer provides easy loading of materials.



EZG[®] MIXERS



Model EZG7

- 1 1/2 to 2 bag capacity or 7 cu. ft. (.2 m³)
- 7.9 HP Honda[®] Gas Engine (Standard)
- Will mix up to 3/4" (1.9 cm) aggregate
- Discharges up to 21" high without the use of blocking
- 48 in. load height
- Manual recoil start
- 3/16" drum thickness
- Empty weight 820 lb. (371.9 kg)
- 4" x 6" rectangular structural tubing
- 1 1/4" solid steel shaft
- 2" ball hitch
- Pintle hitch available
- Optional leg kit
- Electric models available



Model EZG9

- 2 1/2 to 3 bag capacity or 9 cu. ft. (.25 m³)
- 7.9 HP Honda[®] Gas Engine (Standard)
- Will mix up to 3/4" (1.9 cm) aggregate
- Discharges up to 20 in. high without the use of blocking
- 56 in. load height
- Manual recoil start
- 3/16 in. drum thickness
- Empty weight 970 lb. (440 kg)
- 4" x 6" rectangular structural tubing
- 1 3/4" solid steel shaft
- 2" ball hitch
- Optional leg kit
- Pintle hitch available
- Electric models available



Model EZG12

- 3 to 4 bag capacity or 12 cu. ft. (.34 m³)
- 11.7 HP Honda[®] Gas Engine (Standard)
- Will mix up to 3/4" (1.9 cm) aggregate
- Discharges up to 20" high without the use of blocking
- 56" load height
- Manual recoil start
- 1/4 in. drum thickness
- 4" x 7" rectangular structural tubing
- 1 3/4" solid steel shaft
- 2" ball hitch
- Pintle hitch available
- Electric models available



PRODUCT SPECIFICATIONS

Model	EZG7	EZG9	EZG12
Capacity - cu. ft. (m ³)	7 (.2 m ³)	9 (.25 m ³)	12 (.34 m ³)
Capacity - Bags	1 1/2 to 2	2 to 3	3 to 4
Power Source* HP (kw)	Honda GX240 7.9 (5.6)	Honda GX240 7.9 (5.6)	Honda GX390 11.7 (8.7)
Engine Starting	Manual Recoil	Manual Recoil	Manual Recoil
Electric Motor - 1PH/115V HP	1.5	N/A	N/A
Electric Motor - 1PH/230V HP	N/A	5	10
Electric Motor - 3PH/230V HP	N/A	5	10
Electric Motor - 3PH/460V HP	N/A	5	10
Drum Thickness in.	3/16	3/16	1/4
Forklift Pockets	Standard	Standard	Standard
Discharge Height in. (cm)	22 (56)	20 (51)	20 (51)
Load Height in. (cm)	49 (124)	56 (142)	56 (142)
Dump Action	Manual	Manual	Manual
Drive System	Chain	Chain	Chain
Dimensions L x W x H in. (cm)	73 x 47 x 58 (185 x 119 x 147) 104 L w/tongue (264) 70 H w/dump handle (178)	71 x 47 x 62 (180 x 119 x 157) 107 L w/tongue (272) 77 H w/dump handle (196)	73 x 47 x 67 (185 x 119 x 170) 110 L w/tongue 77 H w/dump handle(279)
Weight lb. (kg)	850 (386)	970 (440)	1150 (522)



EZG® Mixers

CUSTOMER REVIEWS

★★★★★ EZG® MIXERS



Rob Roussel, Robert's Masonry

"Being a smaller Mason contractor, we needed a mixer we could count on. Yes, there were cheaper mixers on the market but we needed a mixer that would stay out in the field and out of the shop. We have been using both EZG's manual and hydraulic mixers for over 4 years and plan on adding more to our fleet when needed. Their uphill grout hog is amazing. We watch our competition who are still in the stone age using buckets and tubs to grout and are so happy we have EZG's Grout Hog. The customer service at EZG is also fantastic."



Same brackets attach at anchor location



Installs easily through head joint



Hog Leg without kicker



Hog Leg with kicker

HOG LEG[®]

WALL BRACE SYSTEM




Hog Leg[®] Features

- Engineered wall brace system
- Easy way to brace masonry walls
- Galvanized or painted pipe available
- Works for any type of block
- Adjusts to any wall height
- Fastens through head joints (no cutting of block required or anchor bolts to purchase)
- Makes your job site safer and more productive
- Includes convenient lockable storage rack to store all materials; fits in 8 ft. (2.438 m) bed; avoids theft.
- Fork pockets accessible on all four sides
- Lightweight - heaviest piece weighs 38 lb. (17 kg)
- Total weight 3790 lb. (1719 kg)
- Container dimensions (L x W x H) 89" x 43" x 26"



Hog Leg[®] Extension Kit

- Extension kit to brace higher and further with your existing Hog Legs
- Galvanized or powder coat painted pipe available
- Total kit weight 2370 lb. (1075 kg)
- Total kit dimensions (L x W x H) 169" x 34" x 22"
- Lockable storage container

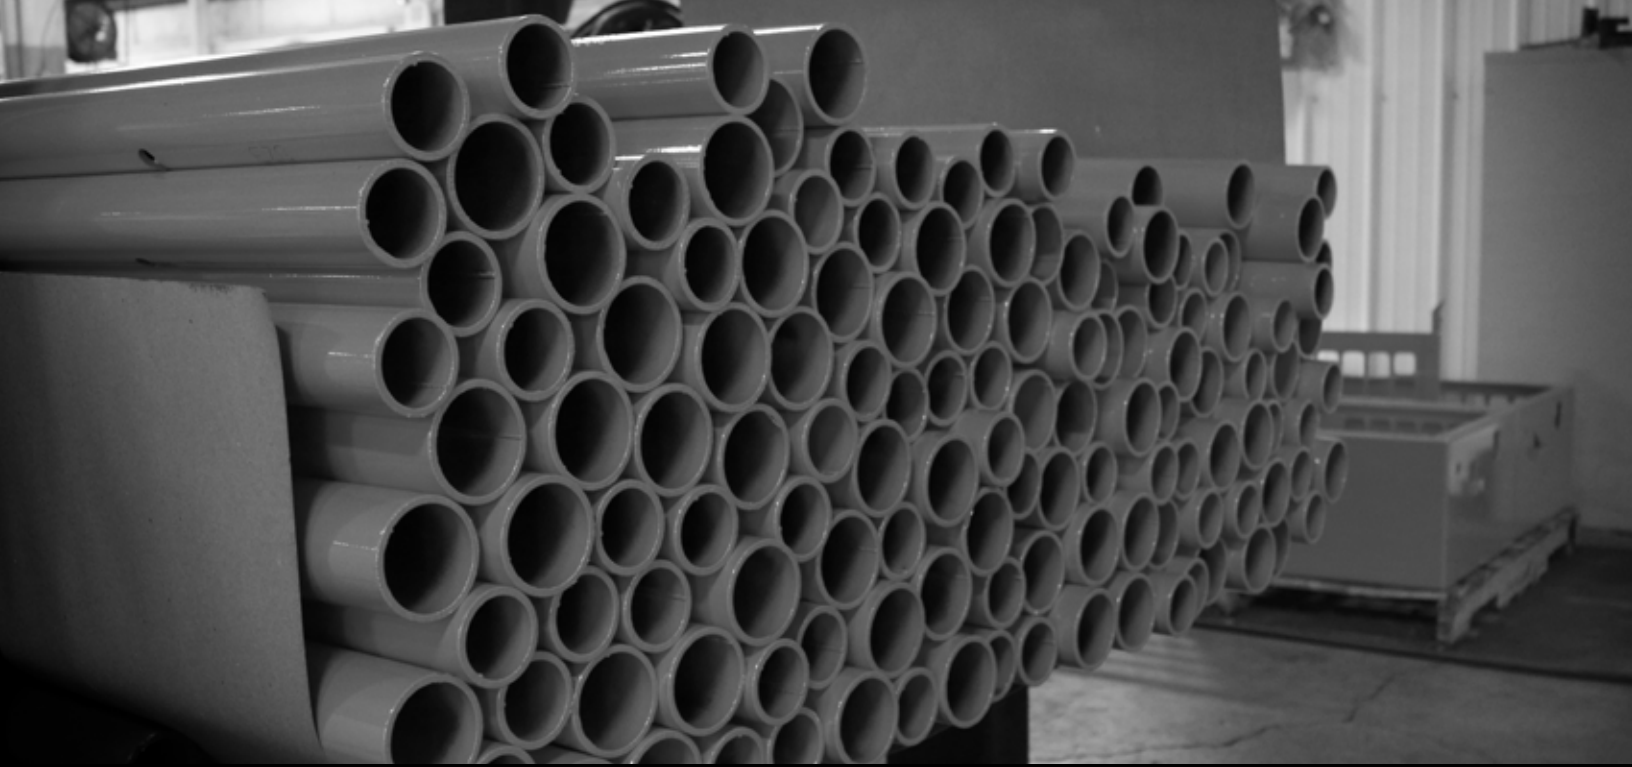

PRODUCT SPECIFICATIONS

Range of Brace Length in.	No. of 7' Hog Leg extensions used	No. of 14' Hog Leg extensions	No. of Braces	Linear Ft. of Wall ft.
HL400 Hog Leg® Brace Kit Only				
7'-2" to 12'-8"	2	N/A	32	400
13'-6" to 18"-9"	3	N/A	21	250
14'-0" to 24-9"	4	N/A	16	200
19'-6" to 30'-10"	5	N/A	12	150
HL400 Hog Leg® Kit and (1) HL14 Ext. Kit				
14'-11" to 20'-8"	1	1	32	400
15'-5" to 26'-9"	2	1	32	400
HL400 Hog Leg® Kit and (2) HL14 Ext. Kit				
21'-4" to 33'-8"	1	2	32	400



Optional swivel adjustment pipes allow for four inch adjustment in and out.



Hog Leg® Wall Brace System

CUSTOMER REVIEWS

★★★★★ HOG LEG® WALL BRACE SYSTEM

"Digger", Duffy Bros. Masonry

"The Hog Legs from EZG are worth their weight in gold! They are easy to use, safe and extremely lightweight."

Rick Swanson, Swanson Masonry

"Hog Legs are the easiest wall bracing system out on the market. We have braced everything from 12 ft. high to 78 in. high walls and have had absolutely zero problems. This system is so easy to use."

Rick Thomas, Rick Thomas Masonry LLC.

"The speed and ease of erecting the wall bracing system is great. The Hog Leg System takes all the doubt away that you may have if you follow the instructions. We had a school project with 30 ft. tall and 8 in. wide block walls. One day the winds speed got up to 70 mph and the Hog Legs kept the walls from falling over. When the inspectors examined the wall for damage the next day, there were no cracks. I truly know the Hog Leg System is a great product. Even the storage container makes the Hog Legs easy to store and easy to pick up and take to the job. They are easy for anybody to put together. The Hog Leg System is simple, durable and very dependable."



Hog Trough®
EZ Grout Corporation
1-800-417-9272 www.ezgrout.com

STEEL HOG TROUGHS®



- Model HTS10**
- 10 cu. ft. capacity
 - 10 gauge steel
 - 165 lb. (75 kg)
 - Forklift pocket access on all 4 sides
 - (LxWxH) 54"x 24"x 23"



- Model HTS10W**
- 10 cu. ft. capacity
 - 10 gauge steel
 - 185 lb. (84 kg)
 - 2 rigid and 2 swivel heavy duty casters
 - (LxWxH) 54"x 24"x 30"



- Model HT10**
- 10 cu. ft. capacity
 - 3/16 gauge steel
 - 255 lb. (116 kg)
 - Built in 1" channels allow for crane operation
 - (LxWxH) 55"x 25"x 23"



- Model HTW10**
- 10 cu. ft. capacity
 - 3/16 gauge steel
 - 330 lb. (150 kg)
 - Built in 1" channels allow for crane operation
 - 2 rigid and 2 swivel heavy duty casters
 - (LxWxH) 55"x 25"x 30"

POLY HOG TROUGHS®



Model HTP10

- 10 cu. ft. (.28 m³) capacity
- Made of tough, nonstick polyethylene
- Resists dents or damage
- Can be cleaned in minutes
- Steel legs for use without pallets
- Lightweight, only 70 lb. (31.8 kg)
- Available in heavy duty polyethylene
- (LxWxH) 54"x 29"x 23"



Model HTP10W

- 10 cu. ft. (.28 m³) capacity
- Made of tough, nonstick polyethylene
- Resists dents or damage
- Can be cleaned in minutes
- 82 lb. (37.2 kg)
- Available in heavy duty polyethylene
- 2 rigid and 2 swivel heavy duty casters
- (LxWxH) 54"x 29"x 30"
- Optional bolt in crane bale (HTP10WC)



Model HTP10C

- 10 cu. ft. (.28 m³) capacity
- Made of tough, nonstick polyethylene
- Resists dents or damage
- Can be cleaned in minutes
- 130 lb. (59 kg)
- Available in heavy duty polyethylene
- Includes bolt-in crane bale
- (LxWxH) 54"x 29"x 27"



HOG CART®

- Avoid maintenance hassles and the expense of broken wheels on your mud pan
- Use to move brick, block or your Hog Trough (sold separately)
- Built to withstand even the most rugged jobsite
- Includes forklift pockets and safety brakes
- Wheels easily on scaffold and into your Hoist Hog
- Corner pockets allow 2" x 4" handles to be used
- Larger Hog Cart available designed to hold block

HOG CRUSHER[®]



Model HCR

- Crushes material down to 2" or smaller
- Up to 10 tons per hour discharge rate
- Heavy plate reinforced construction
- One-half yard hopper capacity
- 24" wide crushing rotor
- Built-in forklift pockets
- Wear items constructed of abrasion resistant Tri-Braze steel
- Replaceable carbide bits, hardened breaker, cleaner and cheek plates – easy on-site maintenance
- Available with standard or high torque motor
- Designed for brick, block, asphalt, unreinforced concrete and other applications.



Mark Viola, Viola Engineering

"Viola Engineering received our Hog Crusher in January 2015 and have used it routinely to crush concrete test cylinders, asphalt, slab concrete, and rock cobbles to avoid ever increasing disposal cost. An additional benefit is that the Hog Crusher reduces our construction waste to a nominal 2 in. dimension with fines that can be recycled as superior road base and fill material on personal projects. The Hog Crusher is ideal for our intermittent accumulation of construction waste with minimal maintenance. To date, we have processed over 100 tons of construction waste on the same set of carbide bullets without excessive wear."



Curt Henderson, Market & Johnson

"The EZG Pump is the simplest and most user friendly pump we have found for grouting walls. From set-up to clean-up, it has been reliable and easy to use."

HOG PUMP®



Model HP-20

- Triple use: Mortar, Grout, and Concrete
- Plus 1 control system with a DP250 Digital display for diagnostic & monitoring
- Horizontal pumping distance 800 ft.; Vertical is 200 ft.
- Ideal for filling block walls with grout or pea gravel
- Delivers up to 18 cu. yd. per hour w/ 2" line
- Features an 8 cu. ft. hopper
- Handles up to 3/4" aggregate (1.9 cm)
- Powered by a 49 HP CAT® Diesel engine
- Full reversible S-Tube valve for increased ease and safety over "ball valve" designs
- Optional wireless remote

MASONRY JOBSITE PRODUCTS

BOOGER HOG®



- Machine weight 22 lb. (10 kg)
- Shipping weight 25 lb. (11 kg)
- 110 V, 5.5 amps, single phase electric power
- 7 in. diameter diamond grinding disc
- Dust collection head with hose barb
- Overall kit dimensions(L × W × H) 63.5" × 15" × 13"
- Quicker, easier wall clean-up
- Does the work of 4 to 5 laborers to save money and time
- Disc Guard allows better cleaning around corners and door frames
- Includes 5.5A Milwaukee Drill
- Durable and easy to service



Jason Allman, Allman Brothers Masonry Inc.

"I can't tell you how much time we have saved using the Boogger Hog. Walls that might have necessitated a ladder or short rolling scaffolding to do by hand, can be cleaned of mortar splatter with this tool."

HOG SLOPPER®



- Available with fork pockets or universal skid steer mount
- Adjustable from 6 3/4 cu. ft. (.19 m³) to 9 cu. ft. (.25 m³)
- Insures consistency of workable mortar for improved production
- Improves batch time
- Helps avoid back strain
- Keeps sand pile away from mixer
- Weight for use with skid steer 260 lb. (118 kg)
- Dimensions for use with skid steer (L × W × H) 41" × 46" × 24"
- Weight for use with forklift 280 lb. (127 kg)
- Dimensions for use with forklift (L × W × H) 59" × 32" × 21"



BRICK HOIST HOG

Shown With Brick Hog Cart

- Maximum capacity 3250 lb. (1474 kg)
- Empty weight 770 lb. (349 kg)
- Overall dimensions (L x W x H) 63" x 36" x 62"
- Material accessible from one end
- Inside Dimensions (L x W x H) 59" x 30" x 50.5"



BLOCK HOIST HOG

Shown With Block Hog Cart

- Maximum capacity 5000 lb. (2268 kg)
- Empty weight 860 lb. (390 kg)
- Overall dimensions (L x W x H) 54" x 54" x 62"
- Material accessible from one end
- Inside Dimensions (L x W x H) 50" x 50" x 50.5"



Damian Lang
CEO - EZG Manufacturing

THE BEGINNING OF EZG

EZG started as EZ Grout and was born from the desire of one man to improve the quality of equipment used in masonry. In 1988 founder and CEO Damian Lang sought to help contractors increase efficiency and profitability with American made products built from hands-on experience. Masonry equipment available at the time lacked sturdiness and reliability, causing operators to experience systemic machine clogs and mechanical failures.

Damian developed the first Grout Hog® after numerous prototypes. Over time, he perfected models by patenting new features specific only to the EZ Grout line, like clog-prevention mechanisms and an innovative delivery system.

SUCCESSFUL EXPANSION

Once Damian's invention proved useful, he turned his creative focus to other areas of construction and masonry, eventually releasing Mud Hog®, Uphill Grout Hog®, Hog Slopper®, Hog Leg®, Hog Trough® and Booger Hog®. In the early 2000's Damian introduced his Fence Hog® which now includes several models for the fencing industry. This automated fence installation equipment is well-known for saving construction crews hundreds of hours on large projects on virtually any terrain.

EZG MANUFACTURING

EZG's reputation as an industry leader in masonry, fencing and construction markets grew and soon its products were found on construction sites all over the globe. As Damian and his team learned more about the industry, they began to develop custom solutions for specific contracting problems. This led to the formation of EZG Manufacturing, which offers an extensive range of services from laser cutting to machining and powder coat painting.

EZG TODAY

Damian continues to expand EZG's services and is quickly becoming a leading industry voice. As an author Damian also shares what he's learned after a lifetime of experience in his book R.A.C.E. - Rewarding and Challenging Employees: For Profits in Masonry. Damian's column, "Contractor Tip of the Month," is featured in multiple major industry magazines. He also regularly offers seminars and consultations for masonry and construction organizations all over the country.

Distributed By:



1-800-417-9272 ezgmfg.com

405 Watertown Road, Waterford, OH 45786

EZG Manufacturing is a division of EZ Grout Corporation

All EZG Manufacturing products are backed by our one-year warranty on parts and are now available for order.

Information in this catalog is subject to change.

Revised 05/04/18