

# Hog Pump®


## Multi-Use Delivery Systems

Built to be rugged, robust and reliable, EZG's line up of pumps handle most types of construction material with ease. Designed specifically for grout, mortar and concrete, the line-up offers both skid-steer and trailer hitch models for easy transport to and from job sites.

With four different models to select from, each built to suit the budgets, reach and transport needs of just about any contractor, EZG's got a hog for everyone.

### HP-20T4 Features:

- Ideal for filling block walls with grout or pea gravel; handles grout, mortar and concrete
- Plus 1 control system with a DM430 Digital display for diagnostic & monitoring
- Pumping distance of 800 ft. (244 m) horizontal and 200 ft. (61 m) vertical
- Handles up to 3/4" (20 mm) aggregate
- Features an 8 cu.ft. (225 L) hopper
- Delivers up to 15 cu.yd. (11.5 m<sup>3</sup>) per hour with a 2" (50 mm) line
- Fully-reversible S-Tube valve for increased ease and safety over "ball valve" designs
- Optional wireless remote option for operator convenience and safety

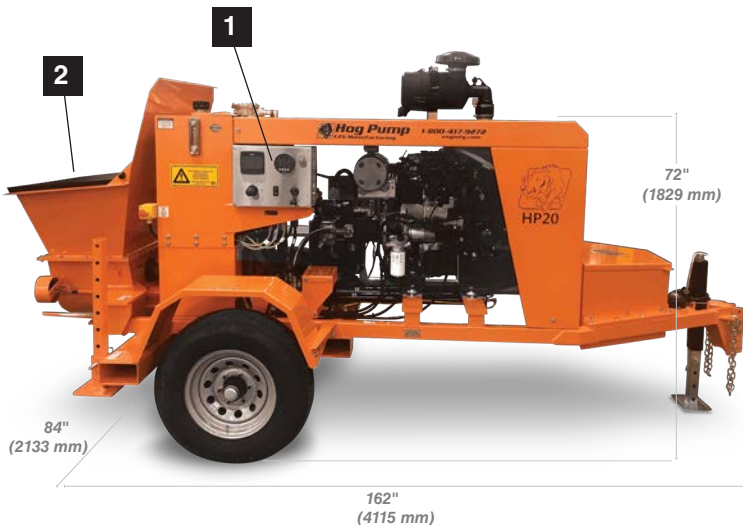


### HP-38 / 38SM / 38SS Features:


- Handles self-consolidating, 3/8" ready mix and light-weight concrete as well as masonry grout, pour & form; shotcrete and slurry.
- Progressive cavity pumping with variable speed hydraulics and reversible functionality
- Handles 3/8" (10 mm) pea gravel
- Features an 8 cu.ft. (225 L) hopper
- Delivers up to 10-12 cu.yd. (7.6 - 9.2 m<sup>3</sup>) per hour with a 2" (50 mm) line
- Diesel and electric power supply options



Optional wireless remote feature



S-Tube valve delivers increased safety



Progressive cavity pumping.

**Increase efficiency, profitability and safety on the job.**

Model HP-38

Model HP-38SM

Model HP-38SS



Hog Pump® Specifications

MODEL	HP-20T4	HP-38	HP-38SM	HP-38SS
Overall Dimensions: (L x W x H)	162" x 72" x 84" (4115 x 1829 x 2133 mm)	149" x 70" x 60" (3785 x 1778 x 1524 mm)	112" x 44" x 44" (2845 x 1118 x 1118 mm)	88" x 38" x 38" (2235 x 965 x 965 mm)
Hopper Capacity	8 cu.ft (225 L)	8 cu.ft (225 L)	8 cu.ft (225 L)	8 cu.ft (225 L)
Aggregate Size	3/4" (20 mm)	3/8" (10 mm)	3/8" (10 mm)	3/8" (10 mm)
Power Source	Kubota Diesel 59 HP (44 kw)	Kohler ECH980 38 HP (28 kw)	Kohler ECH980 38 HP (28 kw)	Auxiliary Hydraulic Powered up to 42 GPM @ 2,600 psi.
Axel Kit	standard	standard	--	--
Material Discharge/ (output line)	15 cu.yd. (11.5 m³) / 2" (50 mm)	10-12 cu.yd. (7.6-9.2 m³) / 2" (50 mm)	10-12 cu.yd. (7.6-9.2 m³) / 2" (50 mm)	8-10 cu.yd. (6.1-7.6 m³) / 2" (50 mm)
Wheels	15" (381 mm)	15" (381 mm)	--	--
Weight	3,200 lbs. (1,451.5 kg)	2,230 lbs. (1011.5 kg)	2,080 lbs. (943.5 kg)	925 lbs. (419.5 kg)



[ LEARN MORE ]

**f in @ Love it? We want to hear from you.**

Snap a photo or capture a video of your team putting any of our Hog Pumps to use and post it. Remember to tag us @EZG and use #leanmasonry, in your post.

... Thank you for your continued commitment to the EZG product line.



1-800-417-9272 / ezgmfg.com / sales@ezgmfg.com  
1833 N. Riverview Road, Malta, Ohio 43758

EZG Manufacturing is a division of EZ Grout Corporation. All EZG Manufacturing products are backed by our **two-year warranty** on parts unless otherwise stated and are available for order direct through our website.

