

Grout Hog®

Optimizing Grout and Concrete Delivery Since 1998.

The Grout Hog series is designed to maximize efficiency and precision in masonry block filling. With six models to choose from, these grout delivery systems offer innovative features such as unique swiveling bases, horizontal or uphill auger designs, and the ability to deliver up to 3/4" aggregate. Built for use with cranes or forklifts, the Grout Hog can unload 3/4 cu.yd. in about 2 ½ minutes, ensuring swift and effective grout delivery.

These features collectively make the Grout Hog a reliable, versatile, and efficient solution for masonry block filling and various other concrete delivery tasks.

Universal Features:

- Swivel-base design allows for a 17 ft. reach without moving the forklift.
- Unloads 3/4 cu.yd. in approx. 2 ½ minutes.
- Handles up to 3/4" aggregate. (UGPH75 handles up to 1/2" aggregate)
- 8 ft. reinforced, collapsible dispensing hose standard.
- Removable auger for easy 15-minute clean-up.
- Hydraulic shut-off for controlling high slump or SCC concrete.
- Pendant cable control operation with optional wireless remote for precision pouring.

Model GPHC75:

- Built for use with crane or forklift
- GX390 11.7 hp Honda engine with electric start (optional diesel engine or electric motor available)

Model GH75:

- Hooks to auxiliary hydraulics of forklift
- Also delivers sand and dry materials

Model UGPH75:

- Designed for grouting from scaffold side of the wall
- Extended auger tube saves several feet of boom extension on your forklift
- Decreased head height for close pouring near bar joists
- Tilt hopper for easier clean-up



Optional features include crane bail and propane power supply accommodation for auger operation.



4 7/8" diameter auger is engineered for strength and durability, featuring a standard schedule 80 construction.




Hydraulic operated release on chute for optimal control of material discharge.



Increase efficiency, profitability and safety on the job.

Grout Hog® Series Specifications

MODEL	GH75	GPH75	GPHC75	UGH75	UGPH75	UGPHC75
Dimensions: (L x W x H) in. /mm	91" x 41" x 48" (2311 x 1041 x 1219)	91" x 41" x 48" (2311 x 1041 x 1219)	91" x 41" x 66" (2311 x 1041 x 1676)	113" x 47" x 48" (2870 x 1194 x 1219)	113" x 47" x 48" (2870 x 1194 x 1219)	113" x 47" x 63" (2870 x 1194 x 1219)
Auger Type	Horizontal	Horizontal	Horizontal	Uphill	Uphill	Uphill
Material Discharge	3/4 cu.yd. 2.5 min.	3/4 cu.yd. 2.5 minutes	3/4 cu.yd. 2.5 minutes	3/4 cu.yd. 2.5 minutes	3/4 cu.yd. 2.5 minutes	3/4 cu.yd. 2.5 minutes
Capacity	3/4 cu.yd. (0.57 m ³)	3/4 cu.yd. (0.57 m ³)	3/4 cu.yd. (0.57 m ³)	3/4 cu.yd. (0.57 m ³)	3/4 cu.yd. (0.57 m ³)	3/4 cu.yd. (0.57 m ³)
Aggregate Size	3/4" (19 mm)	3/4" (19 mm)	3/4" (19 mm)	1/2" (13 mm)	1/2" (13 mm)	1/2" (13 mm)
Power Source	Auxiliary	Honda GX390 11.7 hp (8.7 kw)	Honda GX390 11.7 hp (8.7 kw)	Auxiliary	Honda GX390 11.7 hp (8.7 kw)	Honda GX390 11.7 hp (8.7 kw)
Hydraulic Flow Rate	10 gpm @ 2000 psi	10 gpm @ 2000 psi	10 gpm @ 2000 psi	10 gpm @ 2000 psi	10 gpm @ 2000 psi	10 gpm @ 2000 psi
Empty Weight	990 lbs. (449 kg)	1429 lbs. (648 kg)	1534 lbs. (696 kg)	1055 lbs. (478.5 kg)	1472 lbs. (668 kg)	1565 lbs. (709.8 kg)
Gross Weight	4010 lbs. (1819 kg)	4436 lbs. 2012 kg)	4525 lbs. (2053 kg)	4055 lbs. (1839 kg)	4475 lbs. (2030 kg)	4565 lbs. 2071 kg)
Lifting Bale	N/A	N/A	Standard	N/A	N/A	Standard

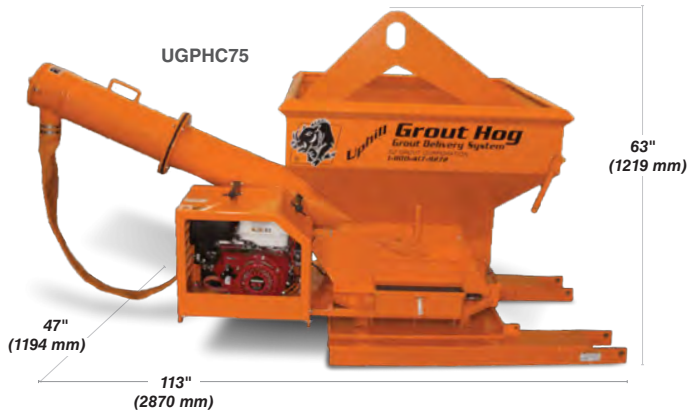

Wireless Remote

A wireless remote option is available on gas powered units.



[VIDEO]
GPH75



[VIDEO]
UGPH75



Love it? We want to hear from you.

Snap a photo or capture a video of your team putting any of our Grout Hogs to use and post it. Remember to tag us @EZG and use #leanmasonry, in your post.

... Thank you for your continued commitment to the EZG product line.



1-800-417-9272 / ezgmfg.com / sales@ezgmfg.com

1833 N. Riverview Road, Malta, Ohio 43758

EZG Manufacturing is a division of EZ Grout Corporation. All EZG Manufacturing products are backed by our **two-year warranty** on parts unless otherwise stated and are now available for order.

