

Fence Hog®

Save Time. Save Money. Reduce Labor.

Developed with input from professional fence builders, the patented Fence Hog units are designed to effortlessly handle and dispense cumbersome rolls of chain link fence. Powered by the hydraulics of a skid-steer loader, the unique cage mechanism opens and tilts to retrieve fence rolls from the ground, allowing contractors to install fences quickly and efficiently with just two people.

Universal Features:

- Universal attachment plate for skid steer loaders
- Adjustable drive forward arm for right or left side dispensing
- Rotating turntable for smooth fence dispensing
- Includes chain-link **or** woven wire stretcher bar*
- Optional 2 ft. and 4 ft. extensions
- Optional tilt backing plate for uneven terrain
- Compatible with chain-link, woven wire, vinyl coated fabric, mini mesh, etc.

Model FH08-36:

- Holds up to 36" (914 mm) diameter roll
- 8 ft. (2.4 m) cage height
- Capacity: 100 ft. (30 m) chain-link, 330 ft. (100 m) woven wire*
- Attaches to skid steer loader or telehandler

Model FH08-24:

- Holds up to 24" (609 mm) diameter roll
- 8 ft. (2.4 m) cage height
- Capacity: 50 ft. (15 m) chain-link, 330 ft. (100 m) woven wire*
- Attaches to skid steer loader or telehandler

Model FHW:

- Holds up to 24" (610 mm) diameter roll
- 6 ft. (1.9 m) cage height
- Capacity: 50 ft. (15 m) chain-link, 330 ft. (100 m) woven wire
- Attaches to walk behind skid steer

* Woven wire capacities may vary based on brand or make

Model FH08-36 pictured with fence winder. An optional add-on mechanism designed for use with fence removal and tear downs to effortlessly roll and stow fence.




Uniquely designed cage mechanism opens and grapples to retrieve the roll of fence from the ground.



Optional tilt adapter plate permits swivel up to 30° in either direction to assist with installation on rocky or uneven terrain.



Stretcher bars* (woven-wire bar pictured) help ensure optimal tension and proper alignment of fence during installs.

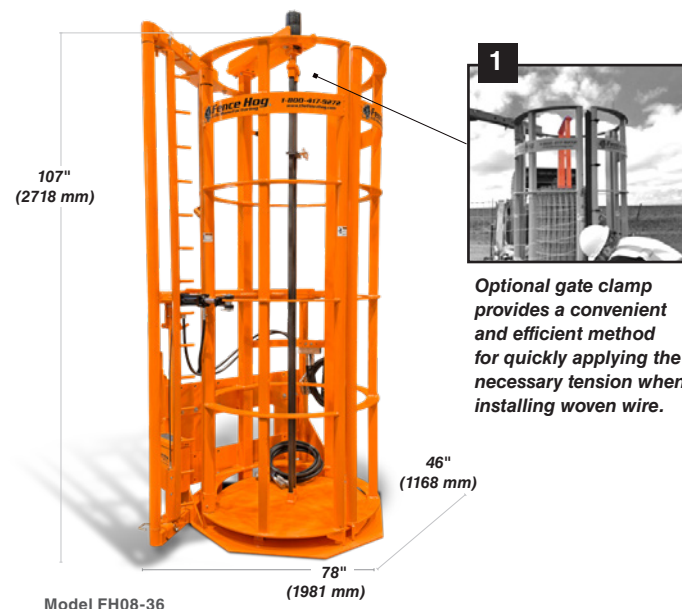

Increase efficiency, profitability and safety on the job.

Model FH08-36

woven wire
stretcher bar



Model FH08-24

chain-link
stretcher bar



Model FHW



Fence Hog® Specifications

MODEL	FH08-36	FH08-24	FHW
Dimensions: (L x W x H) in. /mm	46" x 78" x 107" (1168 x 1981 x 2718)	33" x 74" x 107" (838 x 1880 x 2718)	30" x 40" x 81" (762 x 1016 x 2057)
Weight- empty	1465 lbs. (665 kg)	1195 lbs. (542 kg)	615 lbs. (279 kg)
Weight- w/ 2 ft. extension	1660 lbs. (753 kg)	1350 lbs. (612 kg)	N/A
Weight- w/4 ft. extension	1840 lbs. (835 kg)	1545 lbs. (701 kg)	N/A
Hydraulic Flow Rate	10 gal. @ 2,000 psi min. 35 gal. @ 3,500 psi max.	10 gal. @ 2,000 psi min. 35 gal. @ 3,500 psi max.	10 gal. @ 2,000 psi min. 35 gal. @ 3,500 psi max.
Roll Dimension- width	36" (914 mm)	24" (610 mm)	24" (610 mm)

1- 2 ft. (0.6 m) and 4 ft. (1.2 m) extensions available for models FH08-36 and FH08-24.

2- Hog Hangers slide easily on the top rail to temporarily hold the fence.



[WHITE PAPER]
PDF



[VIDEO]

f in @ Love it? We want to hear from you.

Snap a photo or capture a video of your team putting any of our Fence Hogs to use and post it. Remember to tag us @EZG and use #fencesmarter, in your post.

... Thank you for your continued commitment to the EZG product line.



1-800-417-9272 / ezgmfg.com / sales@ezgmfg.com

1833 N. Riverview Road, Malta, Ohio 43758

EZG Manufacturing is a division of EZ Grout Corporation. All EZG Manufacturing products are backed by our **two-year warranty** on parts unless otherwise stated and are now available for order.

