

**BUILT TO
WITHSTAND
THE TOUGHEST
JOBS.**



HARDSCAPE EQUIPMENT

ABOUT US

THE BEGINNING OF EZG

EZG Manufacturing started as EZ Grout and was born from the desire of one man to improve the quality of equipment used in masonry. In 1998, founder and CEO Damian Lang sought to help contractors increase efficiency and profitability with American made products built from hands-on experience. Masonry equipment available at the time lacked sturdiness and reliability, causing operators to experience systemic machine clogs and mechanical failures. Damian developed the first Grout Hog® after numerous prototypes. Over time, he perfected models by patenting new features specific only to the EZ Grout line, like clog-prevention mechanisms and an innovative delivery system.

SUCCESSFUL EXPANSION

Once Damian's invention proved useful, he turned his creative focus to other areas of construction and masonry, eventually releasing the Mud Hog®, Uphill Grout Hog®, Hog Slopper®, Hog Leg®, Hog Trough® and Booger Hog®. In the early 2000's Damian introduced his Fence Hog® which now includes several models for the fencing industry. This automated fence installation equipment is well-known for saving construction crews hundreds of hours on large projects on virtually any terrain.

EZG MANUFACTURING

EZG's reputation as an industry leader in masonry, fencing, and construction markets grew and soon its products were found on construction sites all over the globe. As Damian and his team learned more about the industry, they began to develop custom solutions for specific contracting problems. This led to the formation of EZG Manufacturing, which offers an extensive range of services including, laser cutting, machining, and powder coat painting.

ENTERING THE HARDSCAPE MARKET

Most recently, EZG identified a natural alignment with it's existing construction, masonry and fencing customer base; the quality line up of equipment they were already supplying to these markets and the needs of hardscape industry contractors. In January 2020, EZG capitalized on this opportunity with the acquisition of Hulton Tool which would lead to the introduction of the Krack Hog® precision brick and block splitter. This robust and innovate splitter was a logical step in EZG's evolution of products and underscored its timely entrance into the hardscape industry. A second acquisition would quickly follow—that of Pavemor and its air lifters and placers that would become the Grip Hog® series. The presence of EZG in the hardscape market now includes vacuum, battery and compressor-operated paver lifters and placers; a line-up of forward, reversible and roller paver compactors; the EZG Mixer, Mobile Mud Hog®, the Hog Crusher® and many more job site essentials.

EZG TODAY

Damian continues to expand EZG's services and is quickly becoming a leading industry voice. As an author Damian also shares what he's learned after a lifetime of experience in his book R.A.C.E. - Rewarding and Challenging Employees: For Profits in Masonry. Damian's column, "*Contractor Tip of the Month*," can be found as a feature in multiple major industry magazines. He also regularly offers seminars and consultations for masonry and construction organizations all over the country.



Damian Lang
CEO - EZG Manufacturing



TABLE OF CONTENTS

Equipment..... 4–13

Forward / Reversible Compactors	5	[jump to]
Roller Paver Compactors	7	[jump to]
Mobile Mud Hog® / Skid Steer Mixers	8	[jump to]
EZG® Mixers	10	[jump to]
Fence Hog®	12	[jump to]
Hog Crusher®	13	[jump to]

Splitting & Cutting 14–17

Krack Hog®	15	[jump to]
Saws / Blades	16	[jump to]
Masks / Dust Control	17	[jump to]

Lifting & Placing 18–22

Grip Hog® Line	19	[jump to]
Grabo	21	[jump to]

Layout Tools 22–26

Smart & Zip Levels	23	[jump to]
Sola / Keson Levels	24	[jump to]
Wheels	25	[jump to]

Jobsite Tools & Accessories 27–34

EZG Hogtrax®	28	[jump to]
Mortar Hog®	29	[jump to]
EZG Wheelbarrow	30	[jump to]
Straps / Ties	31	[jump to]
Deadblows	32	[jump to]
Paver Tools	33	[jump to]
Hardware	34	[jump to]



Equipment



EZG® Compactors

EZG Forward Plate Compactors distinguish themselves with premium operating comfort, compact dimensions and optimum running characteristics. The EZG Forward Plate Compactors are ideal for landscape and hardscape applications including: asphalt, gravel, sand, brick, pavers and more.

Features:

- Unsurpassed machine quality
- Compaction force of 2,358 - 3,461 lbs (1070 - 1570 kgf)
- Anti-vibration handle reduces hand/arm fatigue
- Offered in three different plate sizes
- Folding handle for transport and storage
- Multi-stage filtration system
- Included wheel kit for ease of transportation
- Large capacity water tank
- Optional polyurethane pad



[\[view online \]](#)

The **EZG Reversible Compactor** provides optimum compaction, trouble-free operation, supreme ease of maintenance and reliable quality ensuring long operating hours. The EZG Reversible Compactor has become a yardstick of modern engineering, because progressive development and sophisticated manufacturing technology has been incorporated into a new concept. Fields of application: landscaping, hardscapes and heavy construction.

Features:




- Unsurpassed machine quality
- Compaction force of 6,744-8,991 lbs. (3059 - 4078 kgf)
- Forward and reverse travel
- Infinitely variable hydraulic control
- Low-maintenance
- Quick loading, due to a large fixed lifting lug
- Optional wheel kit for models ERPC150 and ERPC200



[\[view online \]](#)



Forward Plate Compactor: [\[view online \]](#)

MODEL	EFPC60W	EFPC70W	EFPC90C
For quick and efficient compaction of soil and various aggregates			
Plate Size in. (mm)	20" x 14.2" (508 x 360)	20.5" x 17.7" (520 x 450)	23.2" x 19.7" (590 x 500)
Power Source	Honda® GX160 4.8 HP (3.6kw)	Honda® GX160 4.8 HP (3.6kw)	Honda® GX160 4.8 HP (3.6kw)
Centrifugal Force / Vibration Frequency	2,358 lbs. (1,070 kgf) 5,460 v.p.m.	2,778 lbs. (1,260 kgf) 5,640 v.p.m.	3,461 lbs. (1,570 kgf) 5,640 v.p.m.
Operating Weight	148 lbs. (67 kg)	163 lbs. (74 kg)	209 lbs. (95 kg)

Reversible Plate Compactor: [\[view online \]](#)

MODEL	ERPC150	ERPC200	ERPC300
For optimum compaction of sand, gravel, asphalt and paved surfaces			
Plate Size in. (mm)	25.5" x 20" (650 x 500)	27.6" x 24" (700 x 600)	31.5" x 25" (800 x 640)
Power Source	Honda® GX160 4.8 HP (3.6kw)	Honda® GX270 8.4 HP (6.3 kw)	Honda® GX270 8.4 HP (6.3 kw)
Centrifugal Force / Vibration Frequency	6,744 lbs. (3,059 kg) 4,200 v.p.m.	6,744 lbs. (3,059 kg) 5,400 v.p.m.	8,991 lbs. (4,078 kg) 4,200 v.p.m.
Operating Weight	304 lbs. (138 kg)	403 lbs. (183 kg)	661 lbs. (300 kg)



EZG® Roller Compactor

The **EVPC120** is designed to compact or embed large size slabs, pavers, natural stone and wetcast. The EZG roller compactor has rubber-coated rollers that allow the plate to move quickly and efficiently, while at the same time, protects the surface against marking, chipping and cracking. A vibratory roller compactor is recommended by leading manufactures of concrete pavers and polymeric sands.

Features:

- Compaction Force 2,315 lbs (1050 kgs)
- Operating Weight: 305 lbs (138 kg); 25.8" (660 mm) plate
- Folding handle for transport and storage
- Durable rack and pinion throttle lever
- Allows for exceptionally gentle compacting
- Well placed lifting handles



Roller Compactor: [[view online](#)]

MODEL	EVPC120
For compacting or embedding large size slabs, pavers, natural stone and wetcast.	
Roller Surface Area in. (mm)	26.2" x 24.4" (665.5 x 619.8)
Power Source	Honda® GX160 4.8 HP (3.6kw)
Centrifugal Force / Vibration Frequency	2,315 lbs. (1,050 kgf) / 5,640 v.p.m.
Operating Weight	271 lbs. (123 kg)



Universal Poly Pad

PP2419 stops a plate compactor from scratching and white-capping pavers. No more complaints on a hardscape project about scratches or white-cap marks on textured pavers. All paver manufactures recommend using a protective poly pad when compacting the surface of pavers. If your goal is to provide the best quality workmanship then it is a must to have an EZG Universal Poly Pad for your company's compactors.

Features: [[view online](#)]

- Pad protects against scratches & white-capping
- Pad material is wear resistant polypropylene
- C clamps, fast and easy installation and removal
- Pad is 19" x 24" (483 x 610 mm) fits many different plate profiles
- Made in the USA



Mobile Mud Hog®

EZG Mobile Mud Hog brings accessible triple-use mixing to even the most difficult terrain. With all-sides accessible fork pockets, Mobile Mud Hog transport is a breeze with your forklift or skid steer and is equipped with hookups for auxiliary hydraulic power, so you always have access to a convenient power source. If no external power is available, Mobile Mud Hogs pack a powerful Honda® gas engine for additional flexibility.

If you need options, Mobile Mud Hog features a flexible product line up with four different models to serve your specialized needs. Whether you need high-capacity mixing, flexible power, powered dump gates or compact-operation, Mud Hog has an option that fits your needs.

Features: [[view online](#)]

- Mixing capacities range from 4 cu.ft. - 20 cu.ft. (.11 - .57 m³)
- Standard auxiliary hydraulic power source
- Options include extended dump chute, water bar and 11.7 HP (8.7 kw) Honda® gas engine (models MMH12 & MMH20)
- Made in the USA




[\[view online \]](#)

MODEL	MMH4	MMH9	MMH12	MMH20
Capacity	4 cu.ft. (.2 m ³)	9 cu.ft. (.25 m ³)	12 cu.ft. (.34 m ³)	20 cu.ft. (.57 m ³)
Capacity - Bags	3 to 4	8 to 9	11 to 14	19 to 20
Power Source	Auxiliary Hydraulics	Auxiliary Hydraulics	Auxiliary Hydraulics	Auxiliary Hydraulics
Min. Hydraulic Flow	4 gpm @ 2000 PSI	4 gpm @ 2000 PSI	10 gpm @ 2400 PSI	10 gpm @ 2400 PSI
Max. Hydraulic Flow	16 gpm @ 3000 PSI	26 gpm @ 3000 PSI	40 gpm @ 3000 PSI	40 gpm @ 3000 PSI
Drum Thickness	3/16" (5 mm)	1/4" (6 mm)	1/4" (6 mm)	3/8" (9.5 mm) w/ 5/16" (8 mm) drum wrap
Forklift Pockets	Standard	Standard	Standard	Standard
Dump Action	Manual Gate	Manual Gate	Hydraulic Gate	Hydraulic Gate
Material Discharge	1/2 yd. ³ /min.	1/2 yd. ³ /min.	1/2 yd. ³ /min.	1/2 yd. ³ /min.
Drive System	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Dimensions L x W x H in. (mm)	29" x 44" x 29" (737 x 1118 x 736)	55" x 33"x 42" (1397 x 838 x 1067)	72" x 40" x 52" (1829 x 1016 x 1321)	82" x 45" x 56" (2083 x 1143 x 1422)
Weight lbs. (kg)	482 (219 kg)	750 (340 kg)	925 (420 kg)	1350 (612 kg)



EZG® Mixer

EZG Manual Mixers deliver high-quality mixes in a fully independent, gas-driven system. Triple-use design flexibility allows your mixer to transition flawlessly between concrete, mortar and grout whenever, and however you need them. For heavy materials, a 7.9 hp Honda® gas engine drives the patented vertical paddle mixing system and provides superb chopping power to support better mix homogeneity.

EZG engineers designed our Manual Mixers for long product durability with design details like bearings spaced away from the seals for better part life.

Model EZG7 [\[view online \]](#)

- Will mix up to 3/4" (19 mm) aggregate
- Discharges up to 21" (533 mm) high without the use of blocking
- 4" x 6" (102 x 152 mm) rectangular structural tubing
- 1 1/4" solid steel shaft
- 2" ball hitch
- Pintle hitch available
- Optional leg kit
- Electric models available

Model EZG9 [\[view online \]](#)

- Will mix up to 3/4" (19 mm) aggregate
- Discharges up to 20 in. (508 mm) high without the use of blocking
- 4" x 6" (102 x 152 mm) rectangular structural tubing
- 1 3/4" solid steel shaft
- 2" ball hitch
- Optional leg kit
- Pintle hitch available
- Electric models available



Model EZG12 [\[view online \]](#)

- Will mix up to 3/4" (19 mm) aggregate
- Discharges up to 20" (508 mm) high without the use of blocking
- 4" x 7" (102 x 179 mm) rectangular structural tubing
- 1 3/4" solid steel shaft
- 2" ball hitch
- Pintle hitch available
- Electric models available
- Leg kit included



EZG Mixer Specifications: [\[view online \]](#)

MODEL	EZG7	EZG9	EZG12
Capacity	5.6 cu.ft. (.16 m ³)	9 cu.ft. (.25 m ³)	12 cu.ft. (.34 m ³)
Capacity - Bags*	1 1/2 to 2	2 to 3	3 to 4
Power Source	Honda® GX240 7.9 HP (5.6 kw)	Honda® GX240 7.9 HP (5.6 kw)	Honda® GX390 11.7 HP (8.7 kw)
Engine Starting	Manual Recoil	Manual Recoil	Manual Recoil
Electric Motor - 1PH/115V HP	1.5	N/A	N/A
Electric Motor - 1PH/230V HP	N/A	5	10
Electric Motor - 3PH/230V HP	N/A	5	10
Electric Motor - 3PH/460V HP	N/A	5	10
Drum Thickness	3/16" (5 mm)	3/16" (5 mm)	1/4" (6 mm)
Forklift Pockets	Standard	Standard	Standard
Discharge Height	22" (560 mm)	20" (508 mm)	20" (508 mm)
Load Height	49" (1245 mm)	56" (1422 mm)	56" (1422 mm)
Dump Action	Manual	Manual	Manual
Drive System	Chain	Chain	Chain
Dimensions L x W x H (mm)	71" x 47" x 58" (1803 x 1194 x 1473) 104" L w/tongue (2542) 70" H w/dump handle (1778)	70" x 47" x 63" (1778 x 1194 x 1600) 107" L w/tongue (2718) 77" H w/dump handle (1956)	72" x 49" x 66" (1829 x 1245 x 1676) 110" L w/tongue (2794) 77" H w/dump handle (1956)
Weight	760 (345)	865 (392)	1195 (542)

* Capacities listed are based on 80lb. premix bags.

Fence Hog®

Developed with the assistance of professional fence builders, the patented **Fence Hog by EZG** was designed to satisfy customer requests for a machine that picks up and dispenses cumbersome rolls of chain-link fence easily with no physical effort. Powered by the hydraulics of the skid-steer loader, the uniquely designed cage mechanism opens and tilts to retrieve the roll of fence from the ground.

The standard features of the Fence Hog, this machine allows optimum efficiency for the fence contractor to install fence quickly, easily, and professionally using only two people.

Universal Fence Hog Features:

- Attaches directly to skid steer loader with universal attachment plate
- Drive forward arm can be positioned on either side of unit to dispense material from right or left
- Choice of chain-link or woven wire stretcher bar included
- Optional 2 ft. (0.6 m) and 4 ft. (1.2 m) extension
- Optional tilt backing plate for uneven terrain
- Works with various fencing material such as chain-link, woven wire, vinyl coated fabric, snow fence, etc.

Model FH08-36: [\[view online \]](#)

- Holds up to 36" (914 mm) diameter roll
- Standard cage height is 8 ft. (2.4 m)
- Capacity: 100 ft. (30 m) chain-link, 330 ft. (100 m) woven wire

Model FH08-24: [\[view online \]](#)

- Holds up to 24" (609 mm) diameter roll
- Standard cage height is 8 ft. (2.4 m)
- Capacity: 50 ft. (15 m) chain-link, 330 ft. (100 m) woven wire

Model FHW: [\[view online \]](#)

- Holds up to 24" (610 mm) diameter roll
- Standard cage height is 6 ft. (1.9M m)
- Capacity: 50 ft. (15 m) chain-link, 330 ft. (100 m) woven wire
- Attaches directly to mini skid steer loader or walk behind
- Rotating turntable to smoothly dispense fabric



Optional Accessories: [\[view online \]](#)

- 1- 2 ft. (0.6 m) and 4 ft. (1.2 m) extensions available for models FH08-36 and FH08-24.
- 2- Hog Hangers slide easily on the top rail to temporarily hold the fence.




[\[view online \]](#)

MODEL	FH08-24	FH08-36	FHW
Dimensions D x W x H in. (mm)	33" x 74" x 107" (838 x 1,878 x 2,718)	46" x 78" x 107" (1,168 x 1,981 x 2,718)	30" x 40" x 81" (762 x 1016 x 2,057)
Weight– empty	1,195 lbs. (542 kg)	1,465 lbs. (665 kg)	466 lbs. (211 kg)
Weight– w/ 2 ft. extension	1,350 lbs. (612 kg)	1,730 lbs. (784 kg)	N/A
Weight– w/4 ft. extension	1,545 lbs. (701 kg)	1,910 lbs. (866 kg)	N/A
Hydraulic Flow Rate	10 gal. @ 2,000 psi min. 35 gal. @ 3,500 psi max.	10 gal. @ 2,000 psi min. 35 gal. @ 3,500 psi max.	10 gal. @ 2,000 psi min. 35 gal. @ 3,500 psi max.
Roll Dimension– width	24" (610 mm)	36" (914 mm)	24" (610 mm)

Hog Crusher®

The **HCR** saves time and money by the ton—manage bulky waste—recycle and repurpose old pavers, block, brick and even concrete right on the job site. [\[view online \]](#)

- Crushes material down to 2" or smaller
- Up to 10 tons per hour discharge rate
- Heavy plate reinforced construction
- One-half yard hopper capacity
- 24" (609 mm) wide crushing rotor
- Built-in forklift pockets
- Wear items constructed of abrasion resistant Tri-Braze steel
- Replaceable carbide bits, hardened breaker, cleaner and cheek plates – easy on-site maintenance
- Available with standard or high torque motor
- Designed for brick, block, asphalt, unreinforced concrete and other applications.



NOT FOR USE WITH NATURAL STONE

Splitting & Cutting



Krack Hog®

The **KHBS18** works with an easily pumped hydraulic foot action pedal, which raises the bottom hardened steel blade to easily split block, pavers or bricks. Once the blade meets the stone, it is compressed against the upper blade creating a clean break. This means no more long lever pole sending shock waves up and down your back like other splitters.

With two hardened steel blades, we've eliminated the need for expensive diamond blades and blade replacements. The Krack Hog provides a wide wheelbase for easy transportation on rough job site terrain and can be moved into a skid bucket or trailer without toppling over.

Features:

- Pre-measured splitting table*: 18 3/8" x 16" (467 x 406 mm)
- 24" (610 mm) wheelbase allows for easy transportation around job sites; 10" steel center run-flat wheels
- 20 ton power / 40,000 psi hydraulic force
- Total Weight: 200 lbs. (91 kg)
- 24" wheelbase for ensured stability and easy mobility
- Splits block from 1 1/2" to 8" thick
- Removable handles
- Made in the USA



MODEL	KHBS18	KHBS18-PS
Overall Dimensions: L x W x H in. (mm)	30" x 26" x 41" (762 x 660 x 1041 mm)	30" x 26" x 41" (762 x 660 x 1041 mm)
Table Dimensions: L x W x H in. (mm)	18.375" x 18" (467 x 457 mm)	18.375" x 18" (467 x 457 mm)
Pump Dimensions: L x W x H in. (mm)	--	13" x 13" x 9" (330 x 330 x 229 mm)
Power Source	Foot-Action / manual	Cordless Pump / battery
Battery	--	18V/4.0 Ah x 2
Pump Weight	--	12 lbs. (5.5 kg)
Pump Pressure	--	10,000 psi
Wheels	10" (254 mm)	10" (254 mm)
Weight	216 lbs. (98 kg)	228 lbs. (103 kg)



The Saw Shoe

The **Saw Shoe** is the first tool ever to make the perfect 90 degree cut every time. Cut Natural Stone, Concrete Pavers, Porcelain and more. Cuts will be of the highest quality and will increase your job site efficiency. No more time cleaning up your cuts with a grinder. Saves time and money!

Features: [\[view online \]](#)

- Spring loaded to reduce cutting fatigue
- Easy to adjust depth gage
- Removes completely in a few seconds
- Locks totally out of the way when not using
- Time & Materials Saving = More Profit
- Fits on Stihl, Husqvarna, Dolmar and Makita

MODEL	SIZE
SS410	Stihl TS-410, TS-420, TS-500
SS400	Stihl TS-400
SS700	Stihl TS-700
SS800	Stihl TS-800
SSK70	Husqvarna K-70
SS6114	Dolamr Pc 6114/ Makita EK 6101



Diamond Blades

Our **Diamond Blades** are designed for long life cutting through a variety of materials—specifically designed for concrete pavers, natural stone, clay brick, cured concrete, concrete with steel, green concrete and asphalt. Made with quality materials and each blade comes with its own production number and gives you the ability to use the right diamond blade for each specific type of hardscape installation.

Features: [\[view online \]](#)

- Premium MP Blade 13,000+ cuts 2 3/8" paver
- Professional MP 23,000+ cuts 2 3/8" paver
- Durable and long lasting blades for hardscapes
- Multi-purpose blades and cup wheels
- Natural Stone blades and cup wheels
- Clay brick; Green concrete and asphalt blades



Boar Hog Multi-Purpose Masonry Blades [\[view online \]](#)

MODEL	WESGP312-14TS	GYLK14XH	GY-ATS14IH	GY-TGZ0XP
Description	Masonry Blade Silent Core	Masonry Blade	Masonry Blade	Masonry Blade
Blade Size Arbor	14" (356 mm) 1" (20 mm)	14" (356 mm) 1" (20 mm)	14" (356 mm) 1" (20 mm)	7" (178 mm) 5/8" (16 mm)
Specification	Multi-Purpose Cutting	Multi-Purpose Cutting	Multi-Purpose Cutting	Multi-Purpose Cutting & Grinding
Application	Noise reducing technology. For cured concrete, pavers, block & occasional asphalt.	For cured concrete, pavers, block & occasional asphalt.	For cured concrete, pavers, block & occasional asphalt.	For cured concrete, pavers, block & occasional asphalt.

Boar Hog Masonry Blades for Grinding [\[view online \]](#)

MODEL	GYTB45XP	GY-TAW40-18P1	GY-TAW70-24P1
Description	Masonry Blade	Masonry Cup Wheel	Masonry Cup Wheel
Blade Size Arbor	4.5" (114 mm) 5/8" (16 mm)	4" (102 mm) 5/8" (16 mm)	7" (178 mm) --
Specification	Multi-Purpose Cutting	Multi-Purpose Grinding	Multi-Purpose Grinding
Application	For cured concrete, pavers, block & occasional asphalt.	Swirl pattern for hardscapes & general masonry use.	Swirl pattern for hardscapes & general masonry use.

RZ Mask w/ Active Carbon Filtration [\[view online \]](#)

MODEL	RZ MASK R	RZ FILTER R	RZ MASK XL	RZ FILTER XL
For cutting pavers and blocks. Active carbon filters remove 99% particulates.				
Description	Mesh Mask Black	F1 Mask Filter Standard	Neoprene Mask Black	F1 Mask Filter Scentless
Size	Regular	Regular	XL	XL

Lifting Equipment



Grip Hog®


Compressor / Vacuum Backpack / Battery Operated Lifters and Placers

Precisely place and stack pavers with ease— saving time and minimizing injury.

Operates with portable gasoline or electric compressors; vacuum powered backpack; or completely cordless with two 5V batteries.

Features: [\[view online \]](#)

- Cuts installation time by 40%
- Single-man (T-handle), two-man (H-handle) and crane-hook models
- Lift pad / head sizes available from 6" (152 mm) diameter up to 12" x 24" (305 x 610 mm)
- Lift capacities vary based on vacuum source supply source, lift pad / head size, object porosity and surface texture.

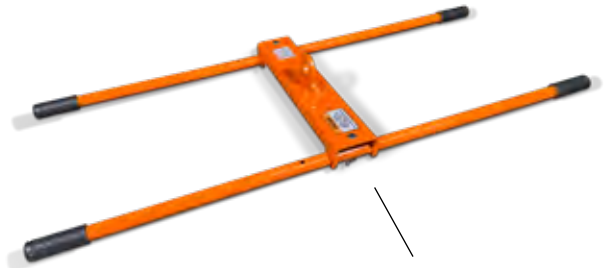

GRIP-HOG-PP2H KIT

Interchangeable two-person / crane hook handle assembly can be applied to any model (compressor, vacuum or battery)



MODEL	PM-1AIR COMPRESSOR	GRIP-HOG-PPC COMPRESSOR	GRIP-HOG-PPV BACKPACK VAC	GRIP-HOG-PPB BATTERY	GRIP-HOG-PP2H HANDLE KIT
Included Handle	T-Handle	T-Handle	T-Handle	T-Handle	H-Handle kit assembly
Operators	one	one	one	one	two / lifting eye
Dimensions* T-Handle (LxWxH)	18" x 29" (457 x 737 mm)	18.5" x 28.5" (470 x 724 mm)	18.5" x 28.5" (470 x 724 mm)	18.5" x 28.5" (470 x 724 mm)	--
Dimensions: H-Handle (LxWxH)	--	--	--	--	56.5" x 21" x 28.5" (1435 x 533 x 724 mm)
Operating Weight*	7 lbs. (3 kg)	16 lbs. (7 kg)	14 lbs. (6 kg)	34 lbs. (15 kg)	--
Vacuum Power Source	120 PSI@ 6 CFM compressor	100 PSI@ 13 CFM compressor	15amp 110v outlet or generator	5V x 2 Milwaukee batteries	n/a

* Dimensions reflect the standard assembled unit configuration;
Operating weight includes 6" x 8" (152 X 308 MM) lift pad / head attachment





Head Attachments [\[view online \]](#)

A variety of lifting pad / head sizes ensures a proper fit to just about any job. These are interchangeable, working on any of our units regardless of vacuum supply source.

Features:

- Adaptable valve / hose connection
- High density memory foam replaceable gaskets
- Heavy-duty A36, 3/16" steel plate surface for superior rigid strength




LIFT CAPACITIES* Head Attachment Part ID # : Dimensions— L x W	PPC COMPRESSOR	PPV BACKPACK VAC	PPB BATTERY
600-A-27: 4" x 6" (102 x 152 mm)	47.2 lbs. (21.4 kg)	N/A	46.4 lbs. (21.1 kg)
600-A-25: 6" x 8" (152 x 203 mm)	279.2 lbs. (126.6 kg)	64.8 lbs. (29.4 kg)	96 lbs. (43.5 kg)
600-A-26: 4.75" x 9.75" (121 x 248 mm)	168.8 lbs. (76.6 kg)	74.4 lbs. (33.9 kg)	113.6 lbs. (51.5 kg)
600-A-24: 6" x 12" (152 x 305 mm)	179.2 lbs. (81.3 kg)	93.6 lbs. (42.5 kg)	220.8 lbs. (100.2 kg)
600-A-23: 8" x 8" (203 x 203 mm)	203.2 lbs. (92.2 kg)	102.4 lbs. (46.4 kg)	152.8 lbs. (69.3 kg)
600-A-22: 12" x 12" (305 x 305 mm)	569.6 lbs. (258.4 kg)	199.2 lbs. (90.4 kg)	372 lbs. (168.7 kg)
600-A-21: 12" x 24" (305 x 610 mm)	1204 lbs. (546.1 kg)	424.8 lbs. (192.7 kg)	776 lbs. (352.0 kg)

* The lift capacities provided are approximate and may vary based on factors such as operator strength, the number of operators involved, and the porosity and surface texture of the material being lifted.

Grip Hog PPB/PPC/PPV was tested using a jib crane, load cell with a digital read-out in (lbs.), and a tow strap. Each unit was turned on and suctioned to the floor, had a tow strap wrapped around the units "T-Handle", then lifted until failure. The force in [lbs.] at failure was then documented.



Grip Hog® – Head Attachments

HEADS:	SKU	SIZE
 [view online]	600-A-27	4" x 6" (102 x 152 mm)
	600-A-25	6" x 8" (152 x 203 mm)
	600-A-26	4.75" x 9.75" (121 x 248 mm)
	600-A-24	6" x 12" (152 x 305 mm)
	600-A-23	8" x 8" (203 x 203 mm)
	600-A-22	12" x 12" (305 x 305 mm)
	600-A-21	12" x 24" (305 x 610 mm)

Grabo Pro

Focus on the lift, not your grip with power in the palm of your hand. We supply a line of unique lifting equipment which includes battery-powered handheld lifting divces like the **GRABO PRO** with smart digital pressure sensor and auto start stop function. These deviceshave a secure grip surface and high efficiency even with difficult materials.

Features: [\[view online \]](#)

- Use to lift most materials - Glass, metal, plastic, wood, ceramic tile, rough concrete, dry wall, rough slate, et..
- Works a wide range of temperatures: 30°F - 140°F
- 14.8V Li-Ion, rechargeable battery - charger and additional battery included.
- 1.5 hours of use out of a single battery charge
- Both come with portable carry case and 1-Year Warranty



SPECIFICATIONS:

Overall Dimensions: (L x W x H)	11.7" x 7.1" x 4.5" (297 x 180 x 114 mm)
Power Source	Battery Operated
Lift Capacity	143 - 375 lbs. (997.9 kg)
Weight	3.3 lbs. (17.2 kg)



Layout Tools



EZG Smart Level

The **EZG Smart Level** is preferred by professional contractors across a wide range of industries to provide fast, easy and accurate readings on the job-site. Unlike transit levels and laser levels the EZG Smart Level works around, behind and even over obstructions. Anywhere you can take the tubing you can take a valid reading and Bluetooth compatibility makes data management a snap. The easy-to-read back-lit digital display renders quick, accurate readings and the simple, one-man operation guarantees better results in less time.

Features: [\[view online \]](#)

- Wireless transfer and storage of data to smart device including 3D Maps and job surveys
- Plots true 3D terrain maps for upload directly into CAD.
- Records comments and adds photos directly into 3D data for job clarity
- Built-in compass for easily aligning 3D Maps and surveys
- Automatically calculates % of Slope between all consecutive points, or 2 selected points

¹ May exceed these temperature ranges however, prolonged use outside of this range may result in damage to instrument.

² Back light use may decrease working time by up to 50%. Lasts 130 months in sleep mode. For most contractors— 4 to 6 months working life under normal conditions.



SPECIFICATIONS: 200-10-1-1-EZG	
Accuracy	Accuracy $\pm 1/16"$ (1.59 mm)
Range (above / below reel)	30 ft. (9.14 m)
Operating Temp ¹	100-10°F (37.8 - 12.2°C)
Tube Length	100 ft. (30.48 m)
Power Supply	2 AA Batteries
Working Life ²	133 hrs. (approx. 16 8hr. shifts)

ZIPLEVEL

ZLPro-2000 Unlike conventional laser levels, ZipLevel displays measurements (inches, feet or meters) directly in large, easy to read digits. The unit sets up quickly and easily, allowing true 1-person operation. NO rods, tripods, line-of-sight issues or calculations needed.

Features: [\[view online \]](#)

- Measures over unlimited ranges no calculations
- Job site rugged
- Zero anywhere within range; No line-of-sight issues
- Measures with paper-thin precision to 0.005" (0.127 mm)
- Replaces rotary lasers; faster and easier
- True one-person operation
- Read elevations directly in digits without math
- Made In The USA



Sola / Keson

Screed Levels The 2-in-1 tool which enables you to level your screed rails and screed your sand "all in one". Instead of beating up that 5' level or struggling with a poor quality wood 2x4, the hardscape professional can be very efficient and accurate with Sola screed levels. If you have a arbor or fence post to set on the job site, go ahead, use your Sola screed level for your vertical plumb.

Box Levels The BIG RED series is the most accurate in the world. With a maximum measurement tolerance of 0.0003 in./in. (0.3 mm/m, 0.017°) for standard measurements and 0.0005 in./in. (0.5 mm/m, 0.029°) for inverted measurements, there's no competition when it comes to choosing a tool for your next important job.

Features: [\[view online \]](#)

- Focus Vial / Level built into screeds and levels
- Made of extruded aluminum
- H bracing for exceptional durability
- Dual hand-grips
- Lifetime warranty



[\[view online \]](#)



[\[view online \]](#)

MODEL	LKS7839	LKS59	LKS98	LKS118	LSBComplete	LSBClassic
Length in. (mm)	32" & 78" (813 & 1981)	60" (1524)	98" (2489)	118" (2997)	10", 16", 24", 32", 48" & 78" (254, 406, 610, 813, 1219 & 1981)	10", 24" & 48" (254, 609 & 1219)
Description	2-pc Screed Level Set	Screed Level	Screed Level	Screed Level	6-pc Box Level Combo w/ case	3-pc Box Level Combo w/ case

Details Both plumb & level vial built into the screed. H-frame bracing inside the aluminum for strength.

MODEL	LSX10	LSX16	LSX24	LSX48
Length in. (mm)	10" (254)	16" (406)	24" (610)	48" (1219)
Description	Hand Level	Hand Level	Hand Level	Hand Level

Details Accuracy in standard & inverted position. Shockproof acrylic easy to read block vials.

Keson Measuring Wheels [\[view online \]](#)

The sturdiest and the most reliable measuring wheels, with the industry's strongest frames and designed to protect the counter—the most valuable component of the wheel. All of our large distance measuring wheels come with a reflector to help keep you safe while you work and are the top-choice for contractors with a 99.7% accuracy rating on a flat, even track.

The MP401E is Keson's only electronic wheel with a steel frame. It is the world's sturdiest electronic measuring wheel and the easiest and most comfortable to use. It will stand up to the harshest conditions.



Features:

- Counter protection
- Simple, center-line functionality
- Great balance
- Huge numbers make for easy reading
- Rugged 3/4 inch steel frame
- Easily folds in half for storage and portability

The RRT12 focuses on control and comfort. Resetting has never been easier with two options, a reset on the handle AND on the unit housing. The center-line handle design makes this unit well balanced.

Features:

- Brake on enhanced pistol-grip-type handle.
- Re-set on the handle AND on the unit housing
- Center-line handle design with counter on top of wheel
- Compact fold-down and Flip-down kickstand
- Gear & shaft transmission for highest measurement accuracy and strength
- No belts to stretch or fail.

MODEL	KESON-MP401E	KESON-RRT12
For measuring distance.		
Description	Electronic Measuring Wheel	Top Reading, Center-line Wheel
Size	15.5" dia. / 4' circ. (508 x 533 x 660 mm)	12" dia. / 3' circ. (508 x 533 x 660 mm)
Weight	5.2 lbs. (2.4 kg)	6.45 lbs. (2.9 kg)
Application	Commercial-grade electronic measuring wheel designed for professionals. Features ergonomic handle, reliable input system, steel frame and sealed counter encasement.	Commercial-grade measuring wheel designed for professionals. Features 5-digit easy read counter, measures 9,999 feet, 11 inches (9,999.9 ft. on the engineers' models and 9,999.9 meters on metric).




GeoMax

The **GeoMax Zone 20 H** rotating laser level is solidly built, economical choice that offers a straight forward interface for the user. All the functions required for flexible, regular use can be found with this unit.

The laser is a visible red beam laser. It is self-leveling in the horizontal plane. Slopes can be manually set in dual axis. GeoMax also offers the MR240 machine mounted receiver that works with any red beam laser.



[\[view online \]](#)

MODEL:	NAME	APPLICATION	SPECIFICATIONS
	Zone20H Laser Level	For survey & building. Economic and firm entry-level rotating laser. With solid-built housing and straight forward interface, this laser offers all functions needed for regular and flexible use.	<ul style="list-style-type: none">• Up to 3000-foot range• Self leveling within $\pm 6^{\circ}$• $\pm 3/32"$ accuracy at 100' (30 m)• Chargeable battery
	Zone20H Tripod	For survey & building. Contractors flathead tripod for rotary lasers and automatic levels.	<ul style="list-style-type: none">• Aluminum 5/8" x 11" (15 x 279 mm) flat head• Height: 38" (965 mm) closed 62" (1575 mm) open
	Zone20H Rod	For survey & building. Durable aluminum grade rod w/ feature scale in inches with easy reading of marks.	<ul style="list-style-type: none">• Height: 13' (4 m)

Jobsite Tools & Accessories



EZG Hogtrax®

EZG ground protection mats specifically engineered for large equipment use on susceptible surfaces. EZG Hogtrax features a robust diamond cleat over honeycomb dual-surface tread design for aggressive grip, while preventing ruts, and establishing stable pathways.

Features: [\[view online \]](#)

- Capable of supporting weights up to 120 tons* per mat.
- Four hand holds per mat for easy manual mobilization and positioning.
- High-density polyethylene material ensures resistance to rot, splintering, warping and breakage.
- Effortless multi-mat connectivity for assembling temporary roads or functional platforms.




GPM-SINGLE-CONNECTOR

Optional stainless steel connection clamps; item sold separately.




SPECIFICATIONS	GPM4x8
Dimensions: (L x W)	48" x 96" (1219 x 1438 mm)
Thickness	1/2 inch (13 mm)
Tread Depth	.273" (7 mm)- Diamond .149" (4 mm)- Honeycomb
Hand Holds	4 (centered on 4 sides)
Approx Area	32 sq.ft. (3 m ²)
Compressive Strength (5% Strain)	2350 psi (16.2 MPa) @ 73.4°F (23°C)
Working Load*	120 tons (120,000 kg)
Weight	92 lbs. (42 kg)

* Load limits are based on application.



Thickness:
0.5" (13 mm)

Tread Depth:
0.273" (7 mm)

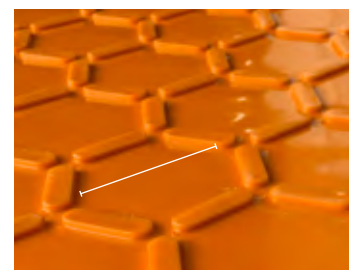

Honeycomb Tread Diameter:
4.25" (108 mm)



Mortar Hog®

The **Mortar Hog Mortar Board** was designed and manufactured to the same industry-leading standard for quality and performance on the job that our entire masonry product line represents.

Features: [\[view online \]](#)

- Sturdy ergonomic design for easy handling and workability
- Beveled edge helps contain mortar reducing waste and site clean up
- Non-porous surface eliminates water absorption, preserving mortar consistency
- Resistant to breakage or splitting caused by prolonged exposure water, sun and extreme cold



SPECIFICATIONS	MHB24*	MHB32x24	MHB30x30
Dimensions: (L x W)	24" x 24" (610 x 610 mm)	24" x 32" (610 x 812 mm)	30" x 30" (762 x 762 mm)
Thickness	.39" (10 mm)	.39" (10 mm)	.39" (10 mm)
Absorption	< 0.01%	< 0.01%	< 0.01%
Tensile Strength	4700 psi	4700 psi	4700 psi
Min. / Max. Temperature	-40°F / 180°F	-40°F / 180°F	-40°F / 180°F
Weight	8.2 lbs. (3.7 kg)	11.0 lbs. (5.0 kg)	13.2 lbs. (6.0 kg)

* Our MHB24 is available with 2 handles (MHB24-2H) as well as a high-density option (MHB24HD) for added strength.



EZG Wheelbarrow

Lightweight Design Delivers Heavyweight Performance.

True to the reputation that the entire EZG Hog line carries in the vast landscape of the general contracting industry our new Model 1088HP Wheelbarrow delivers absolute practicality with premium grade design and material construction.

It's light weight for easy handling and transport to and from the job, with a sturdy frame and deep tray for tackling the most extreme tasks. This wheelbarrow not only makes easy work of moving dirt, gravel, mortar or bulky debris across any work site— like a true Mud Hog®, it also features our low load, high dump functionality. The heightened handle position, extended frame and adjustable fulcrum for wheel position make lifting and dumping a cinch for the operator.

Features: [\[view online \]](#)

- Light weight, travels smoothly over rough terrain.
- Ergonomic, industrial powder-coated, laser welded one piece frame features cross brace for greater strength and easier dumping.
- High-density impact, weather resistant poly tray, stands up to extreme heat and cold.
- Flat free all terrain tire
- Lifetime warranty



MODEL	1088HP
Overall Dimensions: (L x W x H)	61" x 24.5" x 27.5" (1550 x 622 x 698.5 mm)
Max Load / Capacity:	800 lbs. / 6 cu.ft. (363 kg / 0.2 m²)
Wheel:	16" x 4" (406 x 102 mm)
Tray Thickness:	5 mm
Weight (empty)	32 lbs. (14.5 kg)







Quickloader

Quickloader Straps is a new and unique, retractable tie-down. It's faster, easier and cleaner to use than traditional tie-downs. It reduces the time spent on loading and unloading. You can avoid dangerous loose webbing, to ensure safe transportation of loads. Quickloaders can be bolted in place.

[\[view online \]](#)



MODEL	QL150005	QL300003	QL450003	QL100001
Spring loaded retractable straps.	 [view online]	 [view online]	 [view online]	 [view online]
Description	Quickloader 1500	Quickloader 3000	Quickloader 4500	Quickloader 10000
Length	12' webbing (533 x 280 x 280 mm)	15' webbing (533 x 280 x 280 mm)	15' webbing (229 x 229 x 127 mm)	27' webbing (280 x 280 x 152 mm)
Specification	500 lb. (227 kg) work load limit, 1,500 lb. (680 kg) break strength	1,000 lb. (454 kg) work load limit, 3,000 lb. (1361 kg) break strength	1,500 lb. (680 kg) work load limit, 4,500 lb. (2041 kg) break strength	3,300 lb. (1497 kg) work load limit, 10,000 lb. (4536 kg) break strength
Details	single spring loaded retractable, 12' webbing, 1,500 lbs., S-hooks. Sold as 2-pack.	spring loaded retractable 15' webbing, 3,000 lbs., double J hooks, D-rings.	spring loaded retractable, 15' webbing, 4,500 lbs., double J hooks, D-rings.	spring loaded retractable, 27' webbing, 10,000 lbs., wire hooks or flat hooks.

EZG Deadblows

EZG **Deadblow Hammers** are made of one-piece construction and non-slip handle comfort grip, combined with the strength and safety of polyurethane, makes these hammers a toolbox must.

Features: [\[view online \]](#)




- No mushrooming or splitting
- No mark, no spark
- Non-slip handle
- One-piece polyurethane
- Steel canister & rod welded for strength
- Shot filled canister provides action in head
- Lifetime warranty
- Made in the USA




Paver Tools



Paver Tools include our Paver Extractor, Adjustor, Lifter, Persuader and 3'x4'x5' ASquare. These paver tools helps your team be more efficient, increase production, profits and insure quality. We also offer the hardscape professional sprayers for cleaning and sealing of hardscapes surfaces.

Features: [\[view online \]](#)

- Quality construction
- Easy to use tools
- Speeds up job production
- More precise installations
- Replaceable metal blades and rubber heads
- 1-Year Warranty
- Made in the USA

MODEL	DBH4-EZG	DBH7-EZG	DBH14-EZG
	 [view online]	 [view online]	 [view online]
Description	Dead Blow Hammer	Dead Blow Hammer	Dead Blow Hammer
Weight	3.3 lbs. (1.5 kg)	5.5 lbs. (2.5 kg)	12.5 lbs. (5.7 kg)
Specification	Polyurethane	Polyurethane	Polyurethane
Details	Exclusive textured, nonslip, comfort contoured handle & safety flanged butt provide sure grip & reduces worker fatigue.		

MODEL	SPB-311	SPB-312	STH-411
	 [view online]	 [view online]	 [view online]
Description	Extractor	Adjustor	Paver Persuader
Size	4" - 10" (102 - 254 mm) adjustable	40" x 14" x 2" (1016 x 356 x 51 mm)	36" (914 mm) handle / double head
Specification	Paver Extraction	Paver Aligning Bar	Paver Persuader
Application	Used for removing a single paver that has been already placed into the hardscapes.	Used for aligning pavers	Helps straighten paver lines during installation. Metal handled hammer with angled rubber contacts that will NOT damage pavers.

MODEL	34502	SPB-313
	 [view online]	 [view online]
Description	ASquare	Lifter
Size	3' x 4' x 5' (914 x 1219 x 1524 mm)	0" - 21" (0 - 533 mm) adjustable
Specification	Collapsing Layout Triangle	Block Lifter
Application	Guarantees precision layout on paver, masonry and carpentry projects. Folds for easy storage.	A tubular design to lift wall block around the hardscape job site.

Hardware

EZG's Hardware is the hardscape professionals general store. In addition to the hardscape tools, equipment and materials, we provide other supporting items, ideal for any hardscape job site. [\[view online \]](#)

MODEL	DCG437	VAUBL16	P792 / C035	NBC111 / NBC125
				
	[view online]	[view online]	[view online]	[view online]
Description	Brick Chisel	Brick Hammer	Economy Caulk Gun	Professional Caulk Gun
Size	9" x 4" (229 x 102 mm)	20 oz. (567 g)	10 oz. (296 ml) / 28 oz. (282 ml)	10 oz. (296 ml) / 28 oz. (282 ml)
Application	For cutting and chipping hardscape materials. Also used for shaping and facing. Shank head is specially shaped to resist mushrooming.	Rubber grip handle. This hammer is ideal for any hardscape job site.	For using with adhesives and caulking.	For using with adhesives and caulking.

MODEL	SEY 20652 / SEY 20657	BOS8411L / BOS8412X	KOM4925	GRETA105
				
	[view online]	[view online]	[view online]	[view online]
Description	Marking Paint White / Orange	Flex Grip Work Gloves	Tape Measure	Tin Snip
Size	10 oz. (296 ml)	Large / X-Large	25' (7.62 ml)	--
Application	Available in orange, white and red. Designed to mark gravel, soil, grass, concrete and blacktop.	Latex Palm Coated gloves offer you a better fit and grip while you work and provide more protection against cuts and scrapes.	Makes it easy for one person to make measurements and markings, thanks to its rigidity and a lock to keep it unspooled.	Capable of cutting left, right and straight in light stock.

Manufacturer's Warranty

EZG Manufacturing ("EZG") warrants its manufactured products to be free of defects in material or workmanship that develop under normal use for two years.



Warranty period begins on the IN-SERVICE date (date of purchase by the end user of the product, date placed in service by a rental operator, or date of any utilization). All warranty is based on the following limited warranty terms and conditions, including the disclaimer of implied warranties and consequential damages. **Warranty registration is required to establish the in-service date and for the warranty to become effective.**

EZG Limited Warranty & Limitation of Liability Terms:

1. EZG obligation and liability under this warranty is limited to repairing or replacing parts if, after EZG's inspection, there is determined to be a defect in material or workmanship. EZG reserves the choice to repair or replace.
2. If EZG chooses to replace the part, it will be at no cost to the customer and will be made available to the EZG Distributor, Dealer, or Rental Center from whom the End User purchased the product.
3. Replacement or repair parts, installed in the product, are warranted only for the remainder of warranty period of the product as though they were the original parts.
4. EZG does not warranty engines. Engine warranty claims should be made directly to an authorized factory service center for the particular engine manufacturer.
5. EZG's warranty does not cover the normal maintenance of products or its components (such as engine tune-ups and oil & filter changes). The warranty also excludes normal replaceable wear items, i.e. gaskets, wear parts, seals, O-rings, belts, drive chains, clutches, etc. unless such items are deemed to fail due to defective material or workmanship.
6. EZG's warranty will be void if it is determined that the defect resulted from operator abuse, failure to perform normal maintenance on the product, use of non-manufacturer parts, or failure to follow documented service instructions, alterations or modifications made to the product without the written approval of EZG.
7. EZG will pay shop labor on warranty items at the EZG Shop Labor Rate in existence on the date of the warranty claim. EZG technician will determine the time allowed to complete a repair which will govern the shop labor hours to be allowed.
8. EZG will pay freight on warranty replacement parts at worldwide standard ground rates. No warranty replacement parts will be shipped air freight at the expense of EZG. EZG only pays outbound freight charges when sending warranty replacement parts to the customer via ground service. EZG does not pay any inbound freight. However, if EZG determines this to be a warranted item, EZG will then reimburse the customer for inbound freight at standard ground rates.
9. The EZG WARRANTY POLICY WILL NOT COVER THE FOLLOWING: TAXES; SHOP SUPPLIES; ENVIRONMENTAL SURCHARGES; AIR FREIGHT; TRAVEL TIME; LOSS OF TIME; INCONVENIENCE; LOSS OF RENTAL REVENUE; RENTAL COSTS OF EQUIPMENT USED TO REPLACE THE PRODUCT BEING REPAIRED; LOSS OF USE OF THE PRODUCT; COMMERCIAL LOSS; OR ANY OTHER CHARGES WHATSOEVER OR ANY LIABILITIES FOR DIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGE OR DELAY.
10. EZG MANUFACTURING MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED. THIS LIMITED WARRANTY IS IN LIEU OF THE WARRANTY OF MERCHANTABILITY AND FITNESS. THERE ARE NO OTHER WARRANTIES THAT EXTEND BEYOND THE DESCRIPTION ON THIS DOCUMENT.
11. No EZG Manufacturing employee or representative is authorized to change this warranty in any way or grant any other warranty unless such change is made in writing and signed by an officer of EZG Manufacturing.

**WARRANTY REGISTRATION IS REQUIRED
TO ESTABLISH THE IN-SERVICE DATE AND
FOR THE WARRANTY TO BE EFFECTIVE.**



WARRANTY EXCLUSIONS:

EZG 2-year manufacturing warranty excludes sourced products tools and consumables such as but not limited to marking paint, gloves, snips, tape measures, chisels, hammers, caulk guns, straps, brooms, sprayers, squares, levels, tripods, masks, blades, and wheels unless otherwise noted. Other exclusions may apply.



1-800-417-9272 | ezgmfg.com | sales@ezgmfg.com
1833 N. Riverview Rd., Malta, OH 43758

EZG Manufacturing is a division of EZ Grout Corporation. All EZG Manufacturing products are backed by our two-year warranty on parts unless otherwise stated and are now available for order. Information in this catalog is subject to change.