


# EZG Hogtrax®

## Get Maximum Traction with Minimal Impact.

Introducing EZG ground protection mats specifically engineered for large equipment use on susceptible surfaces. EZG Hogtrax features a robust diamond cleat over honeycomb dual-surface tread design for aggressive grip, while preventing ruts, and establishing stable pathways.

- Capable of supporting weights up to 120 tons\* per mat.
- Eight hand holds per mat for easy manual mobilization and positioning.
- High-density polyethylene material ensures resistance to rot, splintering, warping and breakage.
- Effortless multi-mat connectivity for assembling temporary roads or functional platforms.

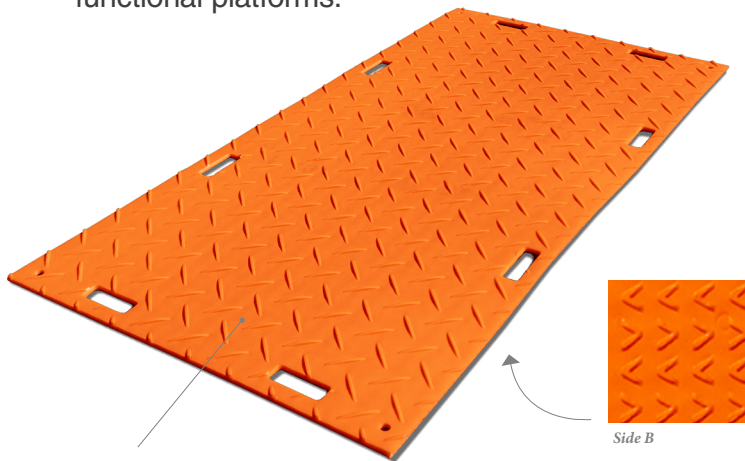

Side A



Side B



### GPM-SINGLE-CONNECTOR

Optional stainless steel connection clamps; item sold separately.



SPECIFICATIONS	GPM4x8 / GPM3x8
Dimensions	48" x 96" (1219 x 1438 mm) / 36" x 96" (914 x 1438 mm)
Thickness	1/2 inch (13 mm)
Tread Depth	..273" (7 mm)- Diamond .149" (4 mm)- Directional Pleat
Hand Holds	8 (two on each side)
Approx Area	32 sq.ft. (2.9 m²) / 24 sq.ft. (2.2 m²)
Compressive Strength (5% strain)	2350 psi (16.2 MPa) @ 73.4°F (23°C)
Working Load*	120 tons (120,000 kg)
Weight	80 lbs. (36 kg) / 60 lbs. (27 kg)

\* load limit based on application



1-800-417-9272 / [ezgmfg.com](http://ezgmfg.com) / [sales@ezgmfg.com](mailto:sales@ezgmfg.com)

1833 N. Riverview Road, Malta, Ohio 43758

EZG Manufacturing is a division of EZ Grout Corporation. All EZG Manufacturing products are backed by our **two-year warranty** on parts unless otherwise stated and are now available for order.

